


9111 Series

Hard Metric Connector Female Straight Type A

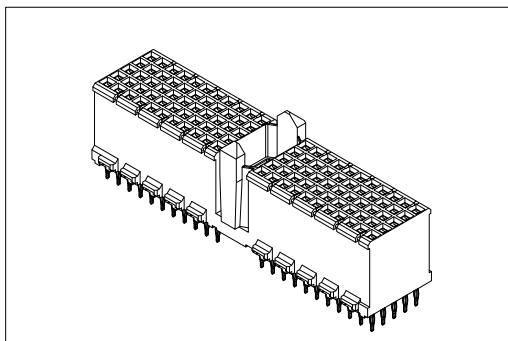

Material:



Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:


Current Rating : 1 A.
Dielectric Withstanding Voltage: AC 750V.
Insulator Resistance: 10000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C ~+125°C.

Features:


* Type A Straight Female.
5 X 22 Position Fully Loaded.

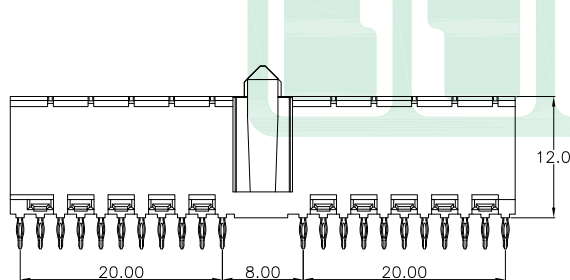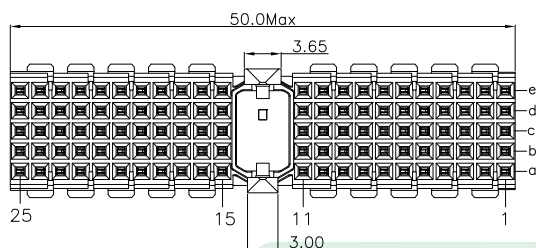


Front Shielded

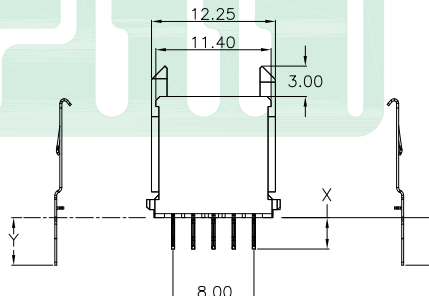

Back Shielded



With Spacer

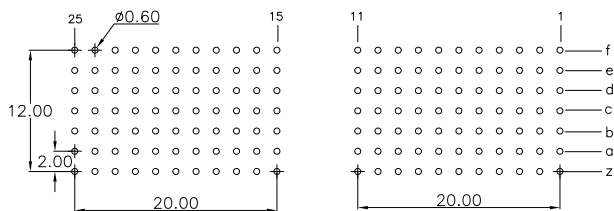

P.C. Board Layout

**Available Length			
X Dip Length	*	*	*
	0	1	2
	3.1	3.3	3.7
Y Shielded Length	*	*	*
	0	1	2
	3.1	3.3	3.7
H Spacer Length	*		
	H1	H2	
	3.1	9.6	

Ordering information

9111- 7 4 A 110 0 1 1 H1 CB 30 A

Series 7Row Female Type A Position 0: Dip Length 3.1mm 1: Dip Length 3.3mm 2: Dip Length 3.7mm 1: None Shielded 2:With Front & Back Shielded Blank : W/O Shielded 0: Shielded Length 3.1mm 1: Shielded Length 3.3mm 2: Shielded Length 3.7mm H1: With Spacer 3.1mm H2: With Spacer 9.6mm CB: Contact Au+Pd/Ni, Dip Tin plated 30:30 μ" A:Tray Package

Information including designs, specifications and components may be changed or updated without notice.

CE06