


9111 Series

Hard Metric Connector Female Straight


Type C

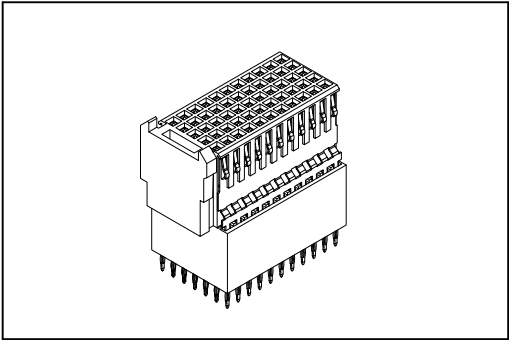

Material:
Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:
Current Rating: 1 A.
Dielectric Withstanding Voltage: AC 750V.
Insulator Resistance: 10000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C ~+125°C.

Features:
* Type C Straight Female.
5X11 Position Fully Loaded.

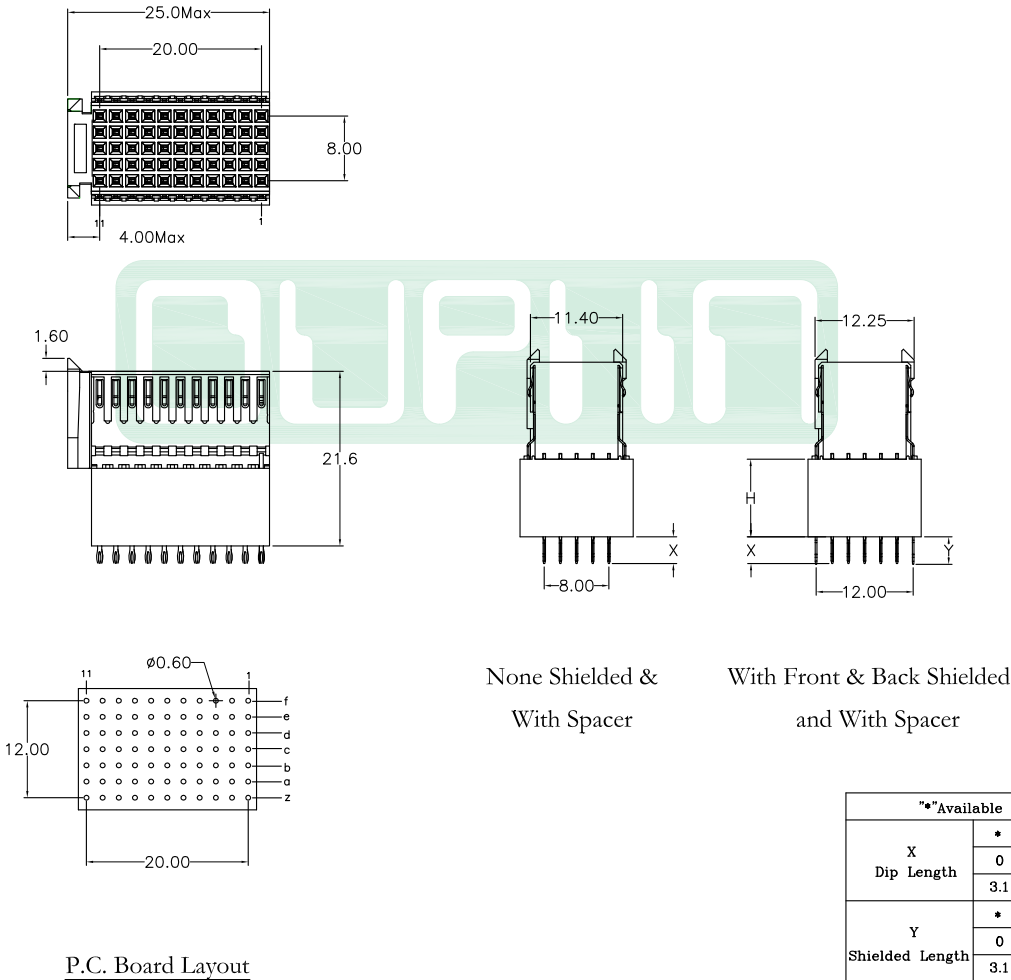

P.C. Board Layout

*Available Length			
X Dip Length	*	*	*
	0	1	2
	3.1	3.3	3.7
Y Shielded Length	*	*	*
	0	1	2
	3.1	3.3	3.7
H Spacer Length	*		
	H1		
	3.1	9.6	

Ordering information

9111-	7	4	C	55	1	2	1	H2	CB	30	A
Series	7Row	4:Female	C: Type C	Position	0: Dip Length 3.1mm 1: Dip Length 3.3mm 2: Dip Length 3.7mm	1: None Shielded 2: With Front & Back Shielded	Blank:W/O Shielded 0: Shielded Length 3.1mm 1: Shielded Length 3.3mm 2: Shielded Length 3.7mm	Blank:W/O Spacer H1:With Spacer 3.1mm H2:With Spacer 9.6mm	CB: Contact Au+Pd/Ni, Dip Tin plated	30: 30 μ"	A:Tray Package

Information including designs, specifications and components may be changed or updated without notice.