

REV.	SPECIFICATION	ECN NO.	APPD.
R2			

Material:

Housing: High Temperature Plastic UL94V-0 .

Power Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: Power: 75AMP.

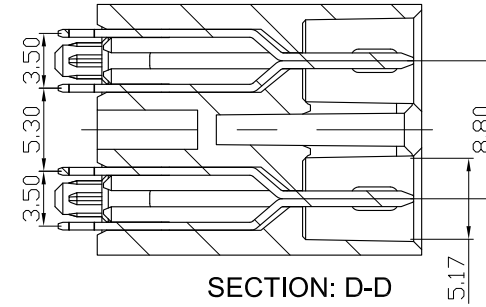
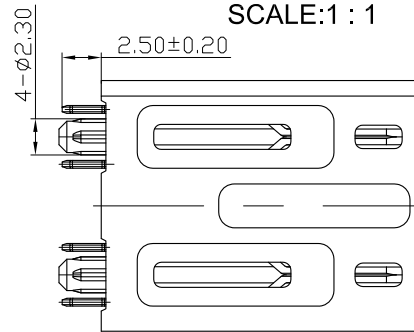

Dielectric Withstanding Voltage:

Power: AC 1500V For 1 minute.

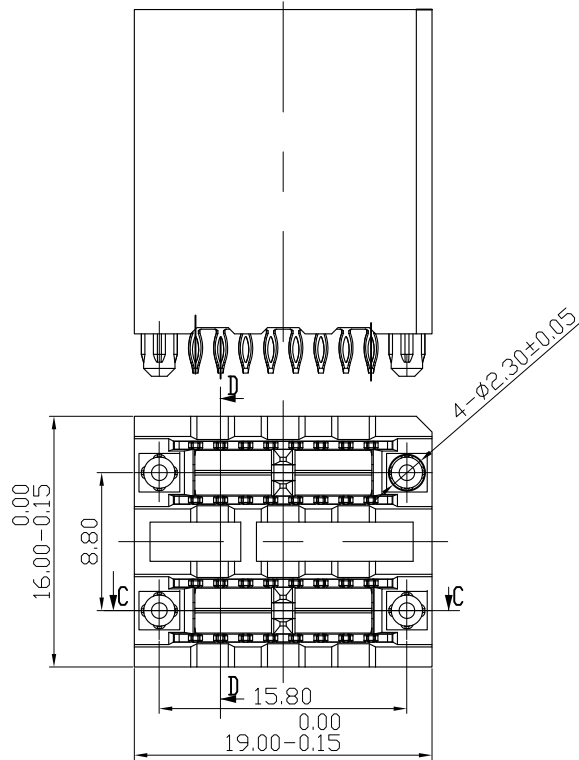
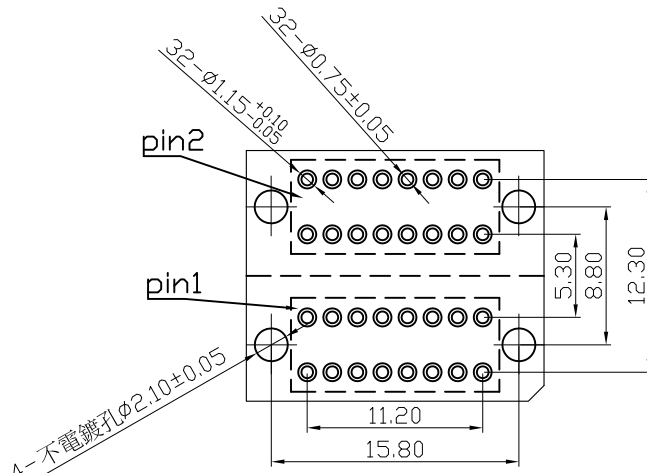
Insulator Resistance:

Power: 1500M Ω min. at DC 500V.Contact Resistance: Power: 0.7m Ω max.
0.3m Ω min

Operating Temperature: -55°C ~ +105°C .

***RoHS Compliant**SECTION: D-D
SCALE: 1 : 1SECTION: C-C
SCALE: 1 : 1

Series 9113 - E 1 2 CB30 P P S A
E: Type E
1: 1 Row
2: Power Pin
CB30: Contact Au+Pd/Ni, Dip Tin
Power Pin: 30u"
A: Tray Package
S: Straight
P: With Post
N: Without Post
P: Press fit Type

P.C. Board Layout (Press Fit Type)
(Tolerance: ±0.05)

Tolerances	Dwg. No.	9113-D0000-009
.x=±0.5	Projection	
.xx=±0.25	Unit	mm
.xxx=±0.15	Scale	1:1
	Drawn By	Kevin 06/29/15

Title:
9113 Series
POWER CONNECTOR

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9113-E12CB30PPSA			
SHEET	1/1	Ver.No.	R2