


9114-A Series

High Flow Power

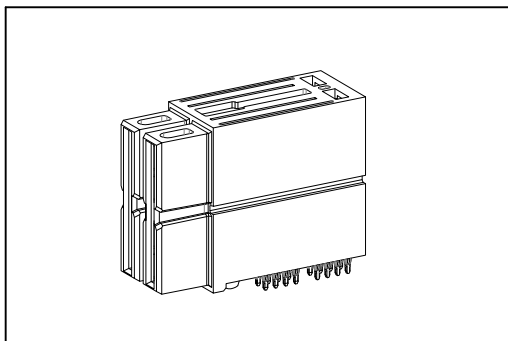

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 35 A(2oz*2)@25°C ambient;

45 A(2oz*4)@25°C ambient.

Dielectric Withstanding Voltage: AC 1500V.

Insulator Resistance: 1500MΩ min.


Contact Resistance: 0.5mΩ max.

Operating Temperature: -55°C ~ +125°C.

Features:

* Additional plating options available.

* Mates with 9113-A.

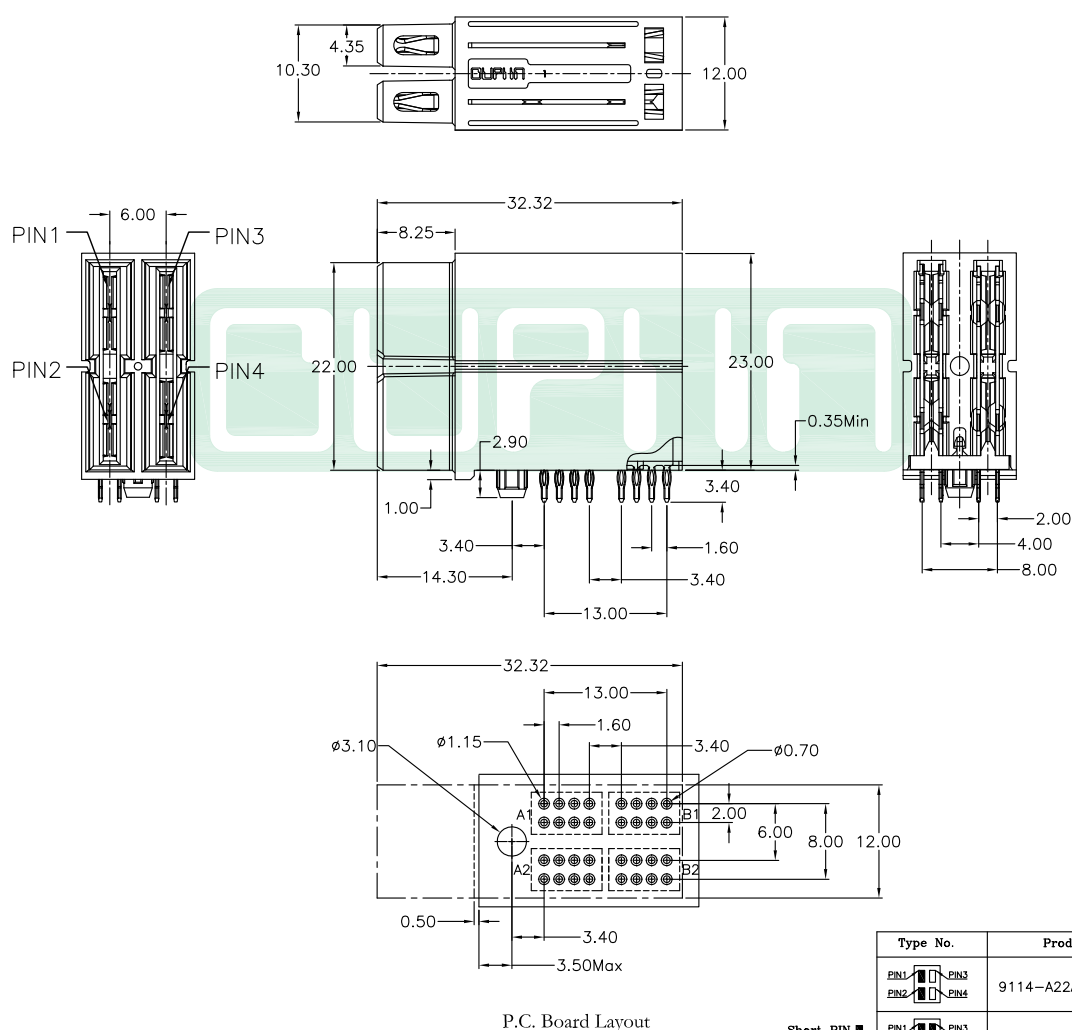

Type No.	Product No.
PIN1 PIN2 PIN3 PIN4	9114-A22ACB30PPRA
PIN1 PIN2 PIN3 PIN4	9114-A22BCB30PPRA

Ordering information

9114- Series	A A:Type A	2 2:2Row	2 2:Power Pin	A A:A Type B:B Type	CB CB:Contact Au+Pd/Ni, Dip Tin plated	30 30: 30 μ"	P P: Press Fit Type	P P: With Post N: W/O Post	R R:Right Angle	A A: Tray Package
-----------------	---------------	-------------	------------------	---------------------------	---	-----------------	---------------------------	----------------------------------	--------------------	-------------------------