


OLPIIN

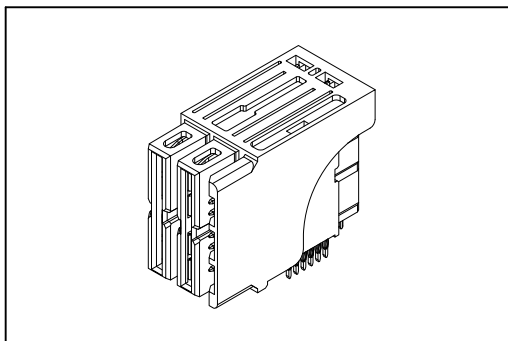

* Additional plating options available.
* Mates with 9113-A.

Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.






Current Rating: Power:35 A(2oz*2)@25°C ambient;
45 A(2oz*4)@25°C ambient.
Signal:1 A@25°C ambient.

Dielectric Withstanding Voltage: Power:AC 1500V.
Signal:AC 750V.

Insulator Resistance: Power:1500M Ω min.
Signal:1000M Ω min.

Contact Resistance: Power: 0.5mΩ max.
Signal: 30mΩ max.

Operating Temperature: -55°C ~+125°C.

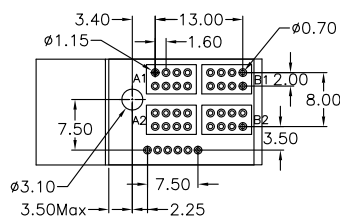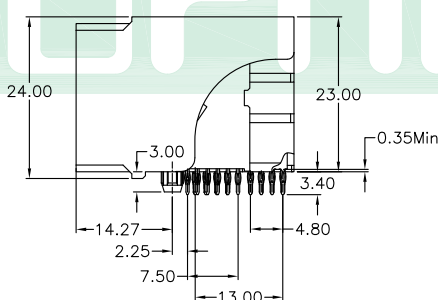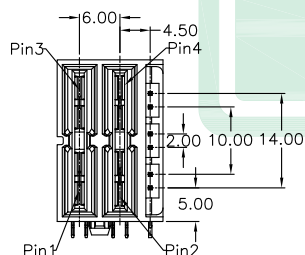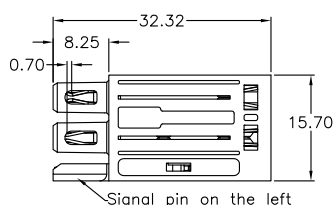

P.C. Board Layout

Long PIN

Short PIN 

Type No	Product No.
	9114-A22LS06CB30-CB30PPR
	9114-B22LS06CB30-CB30PPR

9114-	<u>A</u>	<u>2</u>	<u>2</u>	<u>L</u>	<u>S06</u>	<u>CB</u>	<u>30</u>	-	<u>CB</u>	<u>30</u>	<u>P</u>	<u>P</u>	<u>R</u>	<u>A</u>
Series	A:Type A B:Type B	2:2Row	2:Power Pin	L:Left	S06:Signal Pin	CB:Contact Au+Pd/Ni, Dip Tin plated	30: 30 μ"		CB:Contact Au+Pd/Ni, Dip Tin plated	30: 30 μ"	P: Press Fit Type	P: With Post N: W/O Post	R: Right Angle	A: Tray Package

CA17