


FO connectors - FOC-V14-C1ZNI-B/SJFG:10 - 1408056

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid  
(<http://phoenixcontact.com/download>)

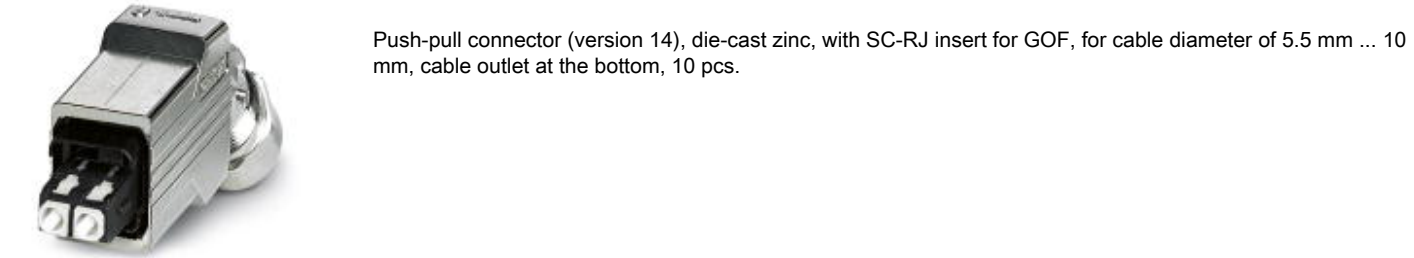

Why buy this product

- ✔ Push-pull ADVANCE connector
- ✔ Locking system to prevent inadvertent removal
- ✔ Highest ESD and EMC resistance for reliable transmission



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 788687
GTIN	4046356788687
Sales Key	ABNADA

Technical data

Mechanical characteristics

Locking type	Push Pull
Insertion/withdrawal cycles	≥ 50
Max. cable diameter	5.5 mm ... 10 mm
External cable diameter	5.5 mm ... 10 mm
Cable exit	angled
Degree of protection	IP65/IP67

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (assembly)	-10 °C ... 40 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Degree of protection	IP67

FO connectors - FOC-V14-C1ZNI-B/SJFG:10 - 1408056

Technical data

Material data

Housing material	Zinc die-cast
Housing surface material	Nickel-plated
Seal material	NBR

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Approvals

Approvals

--


Approvals

EAC
-----

Ex Approvals

--

Approval details

EAC		B.01742
-----	---	---------

--