



Connector set - HC-STA-B16PT-BWSC-LS-M25-ELCAL - 1416356

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid
(<http://phoenixcontact.com/download>)

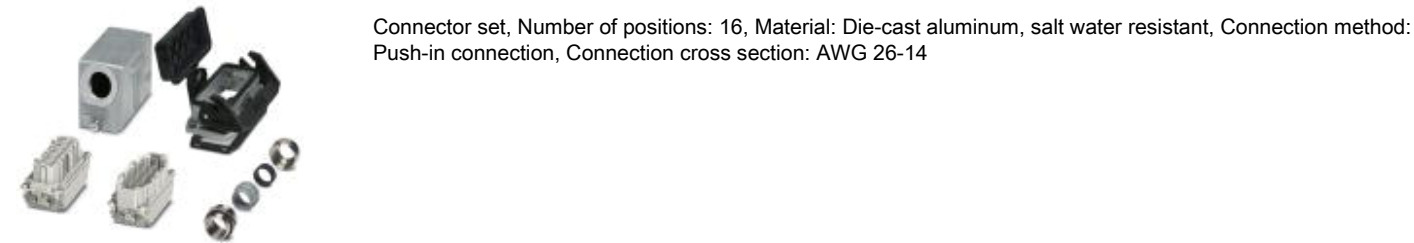

Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 071275
GTIN	4055626071275
Sales Key	BF7BFX

Technical data

General

Number of positions	16+PE
Design	B16
Connection method	Push-in connection
Degree of protection for housing	IP66
	IP67
	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)
Connection method	Push-in connection
Rated voltage (III/3)	500 V
Rated surge voltage	6 kV
Rated current	16 A

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

<https://www.phoenixcontact.com/cn/products/1416356>



Connector set - HC-STA-B16PT-BWSC-LS-M25-ELCAL - 1416356

Articles in set

Contact insert - HC-B 16-I-PT-F - 1407731



HEAVYCON socket insert, B16 series, 16 + PE-pos., push-in connection

Contact insert - HC-B 16-I-PT-M - 1407732



HEAVYCON pin insert, B16 series, 16 + PE-pos., push-in connection

Housing - HC-STA-B16-BWSC-ELC-AL - 1411325



HEAVYCON B16 panel mounting base, with single locking latch, with plastic protective cover, with flat gasket, salt-water-resistant aluminum, conductive profile gasket.

Housing - HC-STA-B16-HLFS-1STM25-EL-AL - 1412725



Sleeve housing B16, for single locking latch, Material: Die-cast aluminum, salt water resistant, Cable outlets: 1, lateral, Height: 60 mm, Cable gland: none, Gland: no, 1x M25, Standard

Cable gland - G-INS-M25-M68N-NNES-S - 1411165



Cable gland, Cable gland material: Nickel-plated brass, External cable diameter 11 mm ... 17 mm, Shielding: No, Connecting thread: M25, Color: silver

Approvals

Approvals

Connector set - HC-STA-B16PT-BWSC-LS-M25-ELCAL - 1416356

Approvals

Approvals

EAC / GL

Ex Approvals

Approval details

EAC		7500651.22.01.00246
GL		http://exchange.dnv.com/tari/ 6196614 HH