

<https://www.phoenixcontact.com/cn/products/1703225>

PCB terminal block - FRONT 4-H-6,35-10 - 1703225

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, Nominal current: 32 A, Nom. voltage: 320 V, Pitch: 6.35 mm, Number of positions: 10, Connection method: Front screw connection, Mounting: Wave soldering, Conductor/PCB connection direction: 0°, Color: green


The figure shows a 5-pos. version of the product

Why buy this product

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Operation and conductor connection from one direction enable integration into front of device

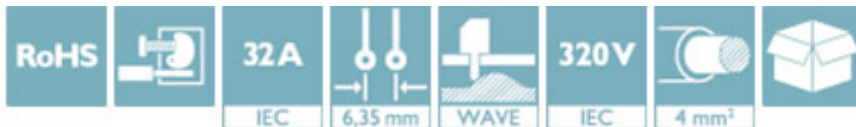

Key Commercial Data

Packing unit	10 STK
GTIN	 4 046356 857116
GTIN	4046356857116
Sales Key	AABBAA

Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Approvals


CSA / EAC

PCB terminal block - FRONT 4-H-6,35-10 - 1703225

Approvals

Ex Approvals

Approval details

CSA		http://www.csagroup.org/services/testing-and-certification/certified-product-listing/	13631
	B	D	
mm²/AWG/kcmil	22-10	22-10	
Nominal current I _N	30 A	10 A	
Nominal voltage U _N	300 V	300 V	

EAC		B.01742
-----	---	---------