

https://www.phoenixcontact.com/cn/products/1859991



## Female insert - MCC-MT 0,5-1,0 - 1859991


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Female contact, is inserted into the plug after crimping the conductor, for the module plug housing MCC 1...-STZ-3,81 and MCC 1...-STZF-3,81, for cross sections of 0.5 mm<sup>2</sup> to 1 mm<sup>2</sup>



### Key Commercial Data

Packing unit	100 STK
Minimum order quantity	100 STK
GTIN	 4 017918 127091
GTIN	4017918127091
Custom tariff number	8536901900
Sales Key	AAAEAD

### Technical data

#### General

Nominal current	8 A (with 1 mm <sup>2</sup> conductor cross section)
Conductor cross section flexible min.	0.5 mm <sup>2</sup>
Max. conductor cross section, flexible	1 mm <sup>2</sup>

#### Connection data

Core diameter including insulation	1.4 mm ... 1.8 mm
Stripping length of individual wires	4 mm


#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


### Drawings

# Female insert - MCC-MT 0,5-1,0 - 1859991

Dimensional drawing

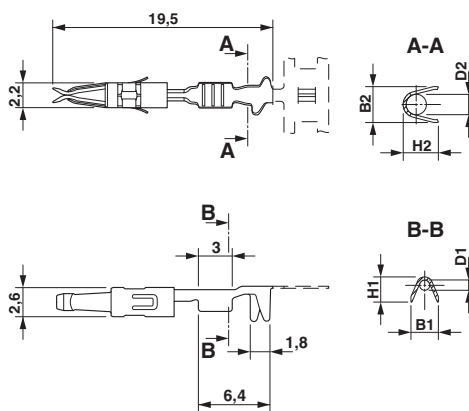

Diagram

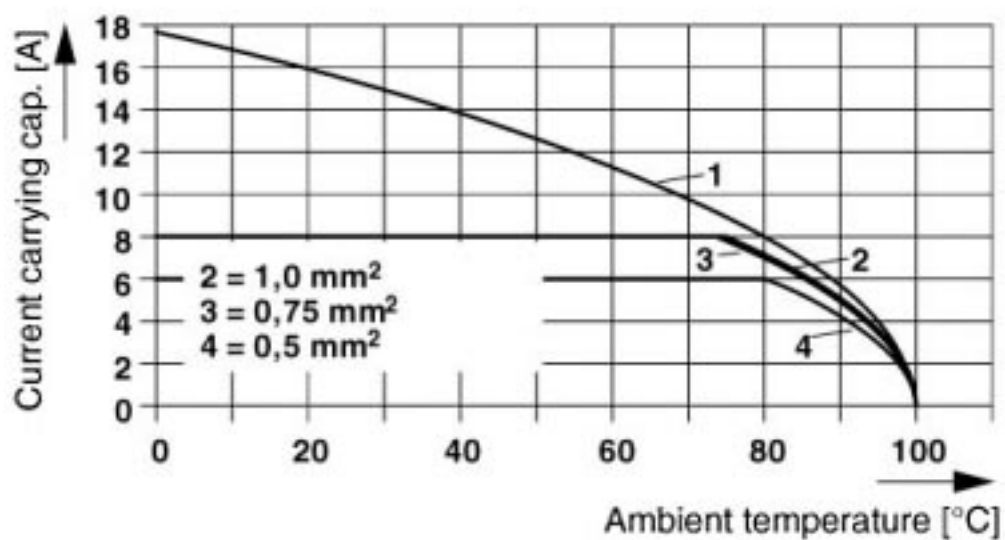

## Approvals

Approvals

---

Approvals

EAC

---

Ex Approvals

---

Approval details

<https://www.phoenixcontact.com/cn/products/1859991>



## Female insert - MCC-MT 0,5-1,0 - 1859991

### Approvals

EAC



B.01742

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>