

<https://www.phoenixcontact.com/cn/products/1871966>

PCB terminal block - MKDSNV 1,5/ 2-5,08 - 1871966

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB terminal block, Pitch: 5.08 mm, Number of positions: 2, Connection method: Screw connection with tension sleeve, Mounting: Wave soldering, Color: green




The figure shows a 10-position version of the product

Why buy this product

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Extremely small design for the respective conductor cross section
- ✓ Anti-rotation pins reduce the mechanical strain on the soldering spots
- ✓ The latching on the side enables various numbers of positions to be combined

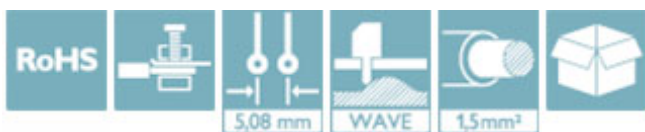

Key Commercial Data

Packing unit	50 STK
Minimum order quantity	50 STK
GTIN	 4 017918 312510
GTIN	4017918312510
Custom tariff number	8536909000
Sales Key	AAABEA

Technical data

Dimensions

Pitch	5.08 mm
Dimension a	5.08 mm
Length of the solder pin	3.5 mm

General

Range of articles	MKDSNV 1,5
Nominal cross section	1.5 mm ²

PCB terminal block - MKDSNV 1,5/ 2-5,08 - 1871966

Technical data

General

Solder pin surface	Sn
Number of positions	2

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Approvals

Approvals

--

Approvals


EAC

--

Ex Approvals

--

Approval details

EAC		B.01742
-----	---	---------

--