

<https://www.phoenixcontact.com/cn/products/1872460>

Base strip - A-MSTBVA 2,5/ 2-G-5,08 - 1872460

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




The illustration shows a 12-position version

Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 2, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Mounting: DIN rail

Why buy this product

- ☒ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies

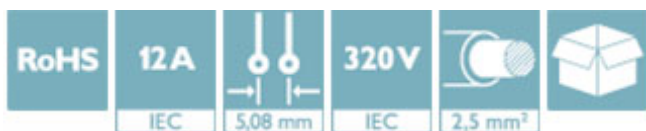

Key Commercial Data

Packing unit	50 STK
Minimum order quantity	50 STK
GTIN	 4 017918 141967
GTIN	4017918141967
Custom tariff number	8536909000
Sales Key	AAFLA

Technical data

General

Color	green
Insulating material	PBT
Flammability rating according to UL 94	V0

Standards and Regulations

Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Base strip - A-MSTBVA 2,5/ 2-G-5,08 - 1872460

Drawings

Dimensional drawing

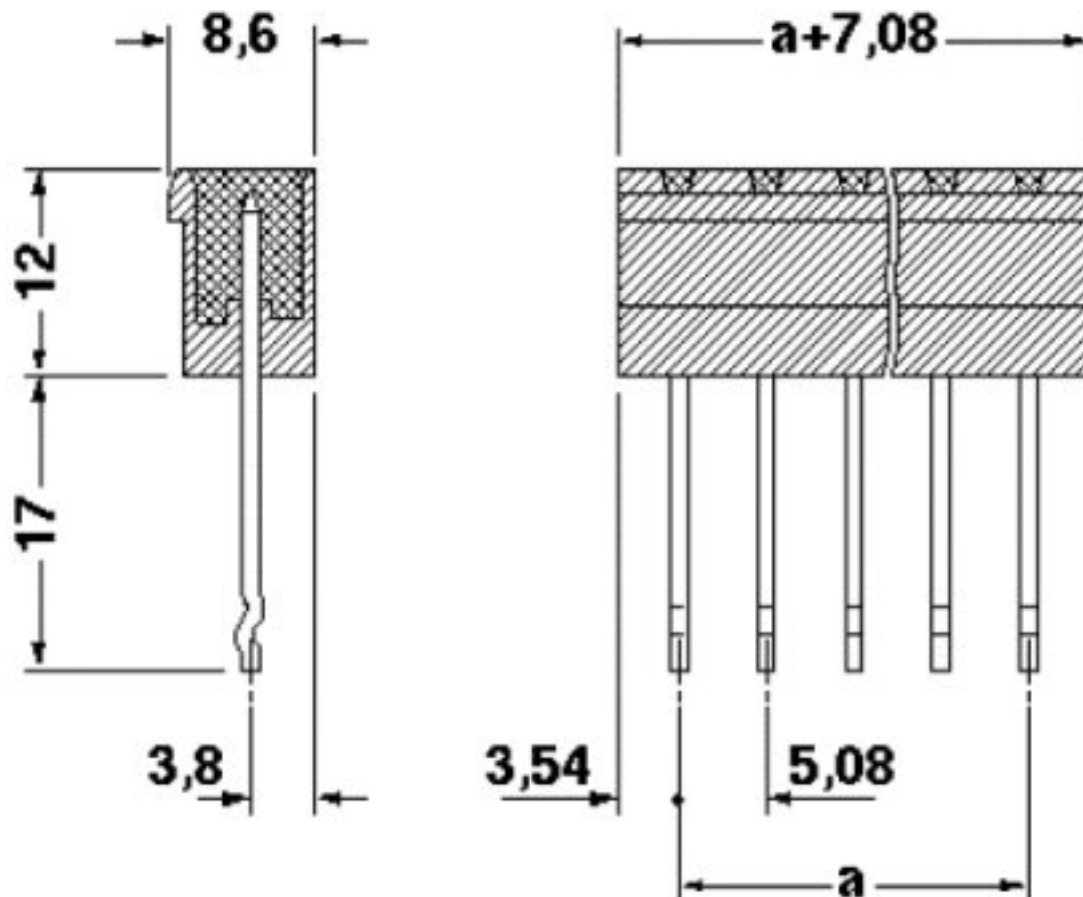

Approvals

Approvals

Approvals

cULus Recognized / EAC

Ex Approvals

Approval details

Base strip - A-MSTBVA 2,5/ 2-G-5,08 - 1872460

Approvals

cULus Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E60425-19931011		
	B	D
Nominal current I _N	12 A	10 A
Nominal voltage U _N	300 V	300 V

EAC  B.01742
