

<https://www.phoenixcontact.com/cn/products/1963421>



Base strip - MC 0,5/ 2-G-2,5 THT - 1963421

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 4 A, Rated voltage (III/2): 160 V, Number of positions: 2, Pitch: 2.5 mm, Color: black, Contact surface: Tin, Mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"




The figure shows a 10-position version of the product

Why buy this product

- Designed for integration into the SMT soldering process



Key Commercial Data

Packing unit	50 STK
Minimum order quantity	50 STK
GTIN	 4 017918 912253
GTIN	4017918912253
Custom tariff number	8536909000
Sales Key	AAADBB

Technical data

Dimensions

Length	10.1 mm
Pitch	2.5 mm
Dimension a	2.5 mm
Width	6.9 mm
Constructional height	8.1 mm
Height	11.9 mm
Length of the solder pin	3.8 mm
Pin dimensions	0,8 x 0,8
Hole diameter	1.4 mm

General

https://www.phoenixcontact.com/cn/products/1963421



Base strip - MC 0,5/ 2-G-2,5 THT - 1963421

Technical data

General

Range of articles	MC 0,5/...G-THT
Insulating material group	IIIa
Rated surge voltage (III/3)	1.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	32 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	160 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	4 A
Maximum load current	4 A
Insulating material	PA
Flammability rating according to UL 94	V0
Color	black
Number of positions	2

Standards and Regulations


Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing



Drilling diagram




https://www.phoenixcontact.com/cn/products/1963421



Base strip - MC 0,5/ 2-G-2,5 THT - 1963421

Dimensional drawing

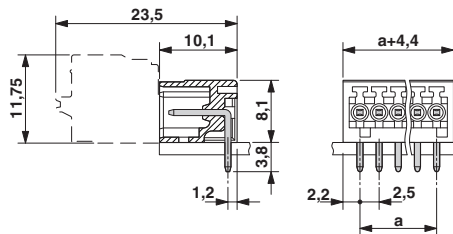

Approvals

Approvals

Approvals

UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / IECCEB Scheme / CCA / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
			B
Nominal current IN			4 A
Nominal voltage UN			125 V

VDE Gutachten mit Fertigungsüberwachung		http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx	40013394
Nominal current IN			4 A
Nominal voltage UN			32 V


cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
			B
Nominal current IN			4 A
Nominal voltage UN			125 V

<https://www.phoenixcontact.com/cn/products/1963421>




Base strip - MC 0,5/ 2-G-2,5 THT - 1963421

Approvals

IECEE CB Scheme		http://www.iecee.org/	DE1-56068-B1B2
Nominal current I _N		4 A	
Nominal voltage U _N		32 V	

CCA	CCA/ DE1 34250		
Nominal current I _N		4 A	
Nominal voltage U _N		32 V	

EAC		B.01742
-----	---	---------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm
------------------	---	---

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>