

<https://www.phoenixcontact.com/cn/products/1969933>

Base strip - IPC 16/ 2-GFU-10,16 - 1969933

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 76 A, Rated voltage (III/2): 1000 V, Number of positions: 2, Pitch: 10.16 mm, Color: green, Contact surface: Silver, Mounting: Wave soldering, Plug direction parallel to the PCB: connector part rotated by 180° with respect to the plug axis.



The figure shows a 5-pos. version of the product

Why buy this product

- ✓ Well-known mounting principle allows worldwide use
- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Inverted header with socket contacts for touch-proof device outputs or PCB/PCB connections
- ✓ Screwable flange for superior mechanical stability
- ✓ Integrated double steel spring provides additional safety in the event of temperature and power fluctuations



Key Commercial Data

Packing unit	50 STK
Minimum order quantity	50 STK
GTIN	 4 017918 948689
GTIN	4017918948689
Custom tariff number	8536909000
Sales Key	AABEBA

Technical data

Dimensions

Length	32.1 mm
Pitch	10.16 mm
Dimension a	10.16 mm
Constructional height	14 mm
Length of the solder pin	4 mm
Pin dimensions	0,8 x 1,2
Pin spacing	10.16 mm

Base strip - IPC 16/ 2-GFU-10,16 - 1969933

Technical data

Dimensions

Hole diameter	1.7 mm
---------------	--------

General

Range of articles	IPC 16/...-GFU
Insulating material group	I
Rated surge voltage (III/3)	8 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (II/2)	8 kV
Rated voltage (III/3)	1000 V
Rated voltage (III/2)	1000 V
Rated voltage (II/2)	1000 V
Nominal current I _N	76 A
Maximum load current	76 A
Insulating material	PA
Flammability rating according to UL 94	V0
Color	green
Number of positions	2


Standards and Regulations

Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

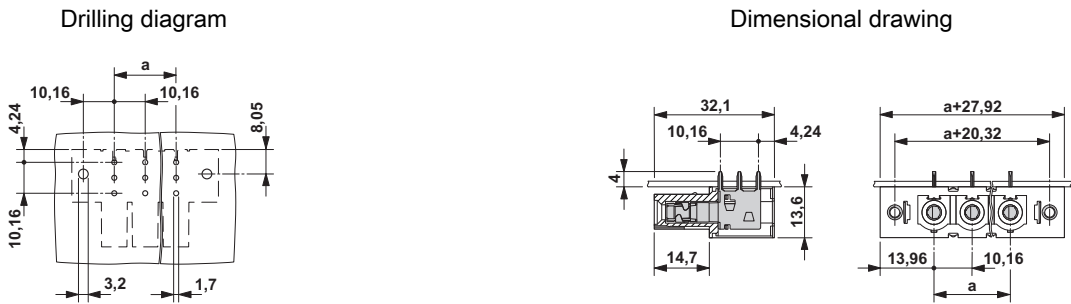

Approvals

Approvals

<https://www.phoenixcontact.com/cn/products/1969933>

Base strip - IPC 16/ 2-GFU-10,16 - 1969933

Approvals

Approvals

UL Recognized / SEV / cUL Recognized / IECEE CB Scheme / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	C	D
Nominal current IN	66 A	66 A	5 A
Nominal voltage UN	300 V	300 V	600 V

SEV		https://www.electrosuisse.ch/en/meta/shop/product-certificates.html	IK-3431
Nominal current IN		76 A	
Nominal voltage UN		1000 V	

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	C	D
Nominal current IN	66 A	66 A	5 A
Nominal voltage UN	300 V	300 V	600 V

IECEE CB Scheme		http://www.iecee.org/	CH-8077
Nominal current IN		76 A	
Nominal voltage UN		1000 V	

EAC		B.01742
-----	---	---------

<https://www.phoenixcontact.com/cn/products/1969933>



Base strip - IPC 16/ 2-GFU-10,16 - 1969933

Approvals

cULus Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>