

PCB terminal block - FKDSO 2,5/ 2-L KMGY - 2200315


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid
(<http://phoenixcontact.com/download>)



PCB terminal block, Nominal current: 22 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 2, Connection method: Push-in spring connection, Mounting: Wave soldering, Conductor/PCB connection direction: 0 °, Color: light gray, Article with lateral pin exit

Why buy this product

- ✔ Spring-cage PCB terminal block for ME/ME MAX electronics housing
- ✔ Push-in Technology simplifies connection
- ✔ 5 mm pitch
- ✔

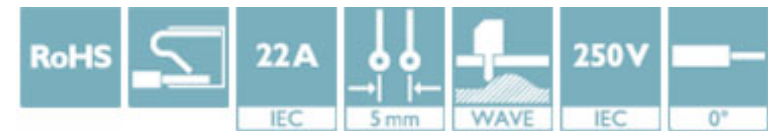

Key Commercial Data

Packing unit	50 STK
Minimum order quantity	50 STK
GTIN	 4 046356 563802
GTIN	4046356563802
Sales Key	ACHADA

Technical data

Dimensions

Length	25.9 mm
Pitch	5 mm
Dimension a	5 mm
Constructional height	24 mm
Height	26.5 mm
Length of the solder pin	3.5 mm
Pin dimensions	0,8 x 1,0 mm
Pin spacing	5.08 mm
Hole diameter	1.4 mm

General

<https://www.phoenixcontact.com/cn/products/2200315>

PCB terminal block - FKDSO 2,5/ 2-L KMGY - 2200315

Technical data

General

Range of articles	FKDSO 2,5/...-L
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V
Rated voltage (III/2)	250 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	22 A
Nominal cross section	2.5 mm ²
Maximum load current	22 A
Insulating material	PA
Flammability rating according to UL 94	V0
Stripping length	10 mm
Number of positions	2

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.25 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	2.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.25 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	1.5 mm ²

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

<https://www.phoenixcontact.com/cn/products/2200315>

PCB terminal block - FKDSO 2,5/ 2-L KMGY - 2200315

Approvals

Approvals

Approvals

UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / CCA / IECCEB Scheme / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	D	
mm ² /AWG/kcmil	24-14	24-14	
Nominal current I _N	10 A	5 A	
Nominal voltage U _N	300 V	300 V	

VDE Gutachten mit Fertigungsüberwachung		http://www.vde.com/en/Institute/OnlineService/ VDE-approved-products/Pages/Online-Search.aspx	40033478
mm ² /AWG/kcmil	0.2-2.5		
Nominal current I _N	22 A		
Nominal voltage U _N	250 V		

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	D	
mm ² /AWG/kcmil	24-14	24-14	
Nominal current I _N	10 A	5 A	
Nominal voltage U _N	300 V	300 V	

CCA	CCA/ DE1 34128		
mm ² /AWG/kcmil	0.2-2.5		
Nominal current I _N	22 A		
Nominal voltage U _N	250 V		

<https://www.phoenixcontact.com/cn/products/2200315>

PCB terminal block - FKDSO 2,5/ 2-L KMGY - 2200315

Approvals

IECEE CB Scheme		http://www.iecee.org/	DE1-49133
mm²/AWG/kcmil		0.2-2.5	
Nominal current I _N		22 A	
Nominal voltage U _N		250 V	

EAC		B.01742
-----	---	---------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm
------------------	---	---

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>