

<https://www.phoenixcontact.com/cn/products/2268028>

Plug-in card block - SKBI 128-B64/B64 - 2268028

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in card block, Number of positions: 128, Pitch: 0 mm, Connection method: Screw connection with tension sleeve, Contact surface: Tin

The illustration shows the version
SKBI 128-B 32/B 32

Why buy this product



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 053956
GTIN	4017918053956
Custom tariff number	8544421100
Sales Key	AAAWAA

Technical data

Dimensions

Length	66 mm
Height	162 mm
Width	252.4 mm
Pitch	0 mm
Hole diameter	4.2 mm

General

Range of articles	SKBI 128
Connection in acc. with standard	EN-VDE
Nominal current I_N	current values are defined by the connectors used
Nominal voltage U_N	voltage values are defined by the connectors used
Nominal cross section	2.5 mm ²

<https://www.phoenixcontact.com/cn/products/2268028>

Plug-in card block - SKBI 128-B64/B64 - 2268028

Technical data

General

Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Number of positions	128

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

Standards and Regulations


Connection in acc. with standard	EN-VDE
----------------------------------	--------

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Plug-in card block - SKBI 128-B64/B64 - 2268028

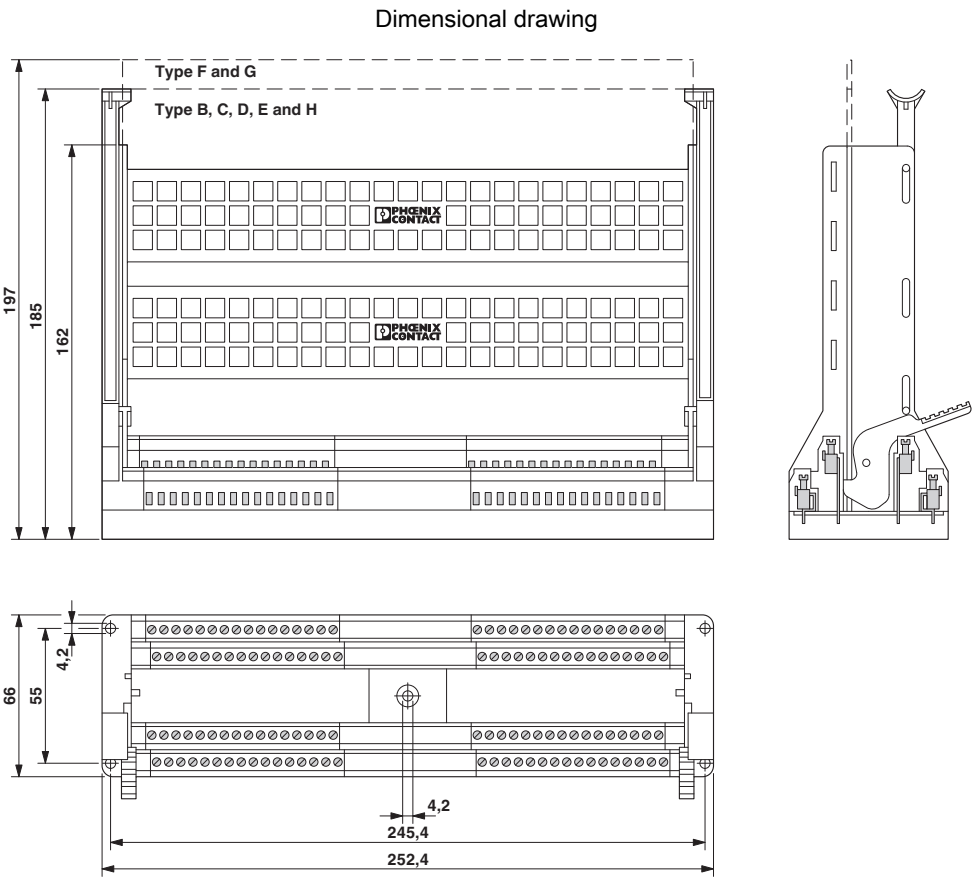

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------