


https://www.phoenixcontact.com/cn/products/2285302



## Socket strip - SFL (2,8-0,8)D32 - 2285302

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Flat connector socket, Number of positions: 32, Pitch: 0 mm, Connection method: Slip-on connection, Color: green, Contact surface: Tin

### Why buy this product



### Key Commercial Data

Packing unit	10 STK
GTIN	 4 017918 055905
GTIN	4017918055905
Custom tariff number	8536909000
Sales Key	AAAWBA

### Technical data

#### Dimensions

Length	10.6 mm
Height	27.6 mm
Width	95 mm
Pitch	0 mm
Hole diameter	2.8 mm

#### General

Range of articles	SFL (2,8-0,8)
Insulating material group	II
Rated surge voltage (III/3)	2.5 kV
Nominal cross section	0 mm <sup>2</sup>
Insulating material	PA-F
Flammability rating according to UL 94	HB
Number of positions	32

<https://www.phoenixcontact.com/cn/products/2285302>



# Socket strip - SFL (2,8-0,8)D32 - 2285302

## Technical data

### Standards and Regulations


Flammability rating according to UL 94	HB
--	----

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Dimensional drawing

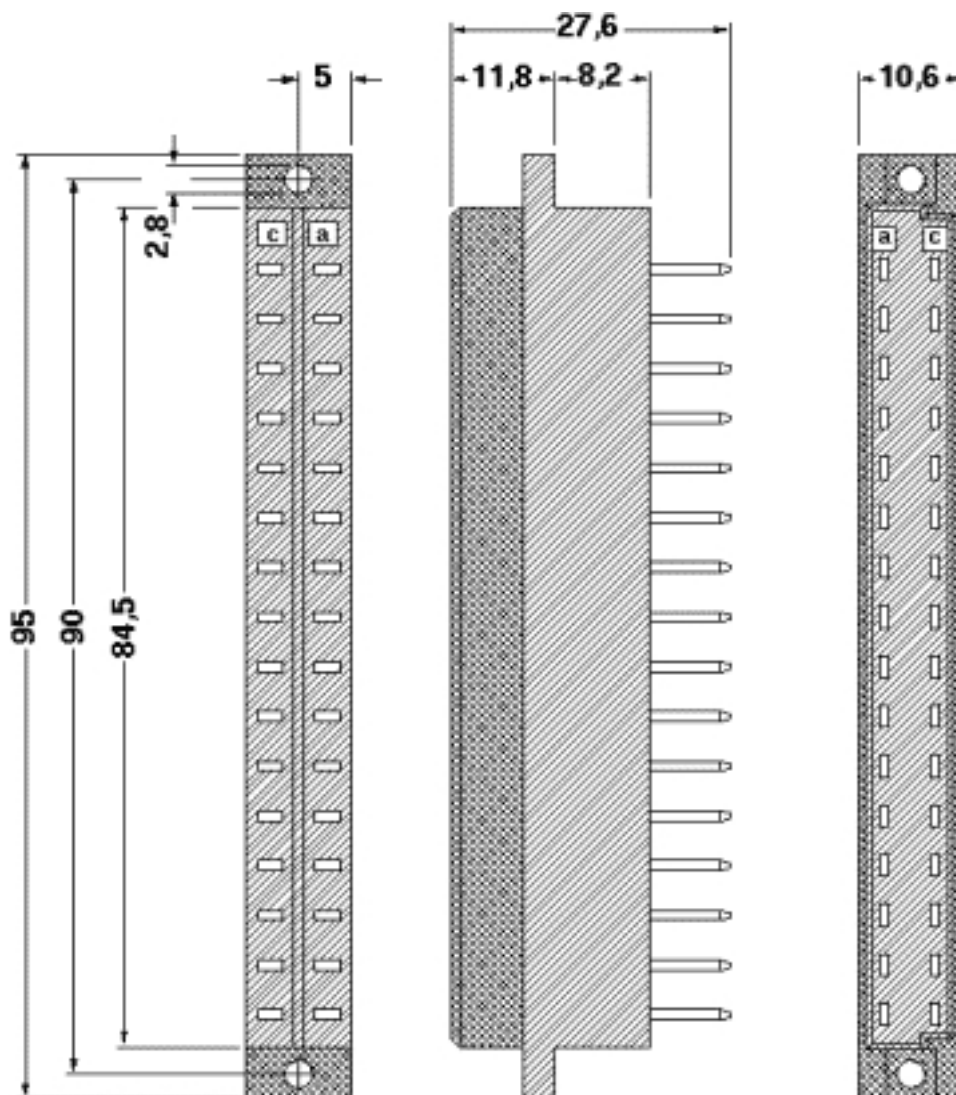

## Approvals

Approvals

<https://www.phoenixcontact.com/cn/products/2285302>



## Socket strip - SFL (2,8-0,8)D32 - 2285302

### Approvals

Approvals

EAC

---

Ex Approvals

---

### Approval details

EAC		B.01742
-----	---	---------

---

Phoenix Contact 2017 © - all rights reserved  
<http://www.phoenixcontact.com>