


<https://www.phoenixcontact.com/cn/products/2285315>

Socket strip - SFL (2,8-0,8)F48 - 2285315

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Flat connector socket, Number of positions: 48, Pitch: 0 mm, Connection method: Slip-on connection, Color: green, Contact surface: Tin

Why buy this product



Key Commercial Data

Packing unit	10 STK
GTIN	 4 017918 055912
GTIN	4017918055912
Custom tariff number	8536909000
Sales Key	AAAWBA

Technical data

Dimensions

Length	14.8 mm
Height	28.6 mm
Width	95 mm
Pitch	0 mm
Hole diameter	2.8 mm

General

Range of articles	SFL (2,8-0,8)
Insulating material group	II
Rated surge voltage (III/3)	2.5 kV
Nominal cross section	0 mm ²
Insulating material	PA-F
Flammability rating according to UL 94	HB
Number of positions	48

01/05/2017 Page 1 / 3


Socket strip - SFL (2,8-0,8)F48 - 2285315

Technical data

Standards and Regulations

Flammability rating according to UL 94	HB
Environmental Product Compliance	
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

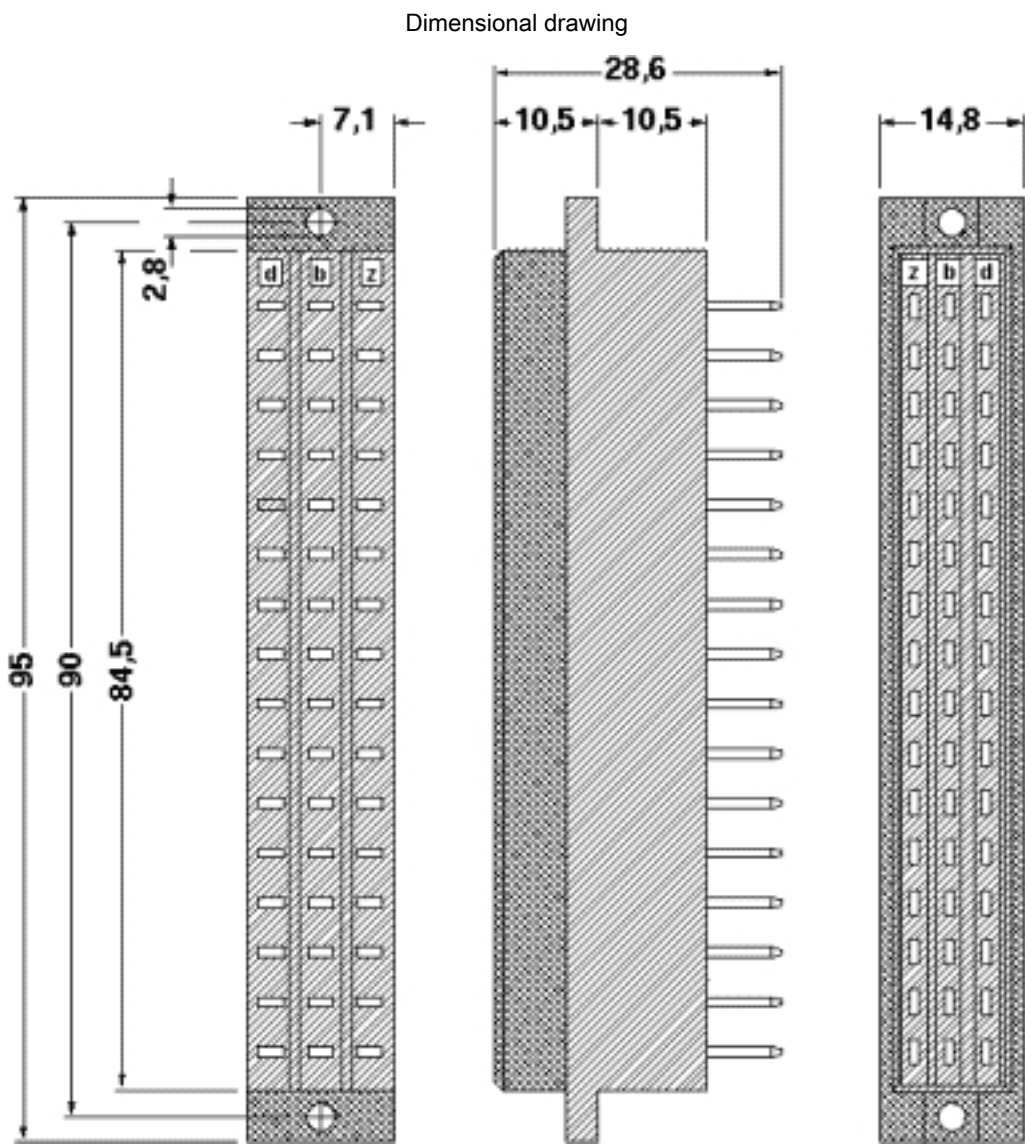

Approvals

Approvals

Socket strip - SFL (2,8-0,8)F48 - 2285315

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------