

https://www.phoenixcontact.com/cn/products/2285467



## Socket strip - SFLY 2,5/D32 - 2285467

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Screw socket, Nominal current: 4 A, Number of positions: 32, Pitch: 5.08 mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface: Gold

### Why buy this product

- Easy field connection to connectors according to IEC 60603/DIN 41617
- Well-known connection principle allows worldwide use
- Low temperature rise, thanks to maximum contact force



### Key Commercial Data

Packing unit	10 STK
GTIN	 4 017918 055943
GTIN	4017918055943
Custom tariff number	8536909000
Sales Key	AAAWBA

### Technical data

#### Dimensions

Length	39.8 mm
Height	32.4 mm
Width	95 mm
Pitch	5.08 mm
Hole diameter	2.8 mm

#### General

Range of articles	SFLY 2,5
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	4 A

<https://www.phoenixcontact.com/cn/products/2285467>

## Socket strip - SFLY 2,5/D32 - 2285467

### Technical data

#### General

Nominal voltage $U_N$	250 V
Nominal cross section	2.5 mm <sup>2</sup>
Insulating material	PA
Flammability rating according to UL 94	V2
Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Number of positions	32

#### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

#### Standards and Regulations

Connection in acc. with standard	EN-VDE
Flammability rating according to UL 94	V2

#### Environmental Product Compliance


China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings




# Socket strip - SFLY 2,5/D32 - 2285467

Dimensional drawing

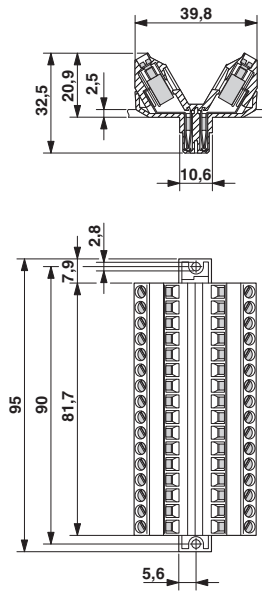

Dimensional drawing

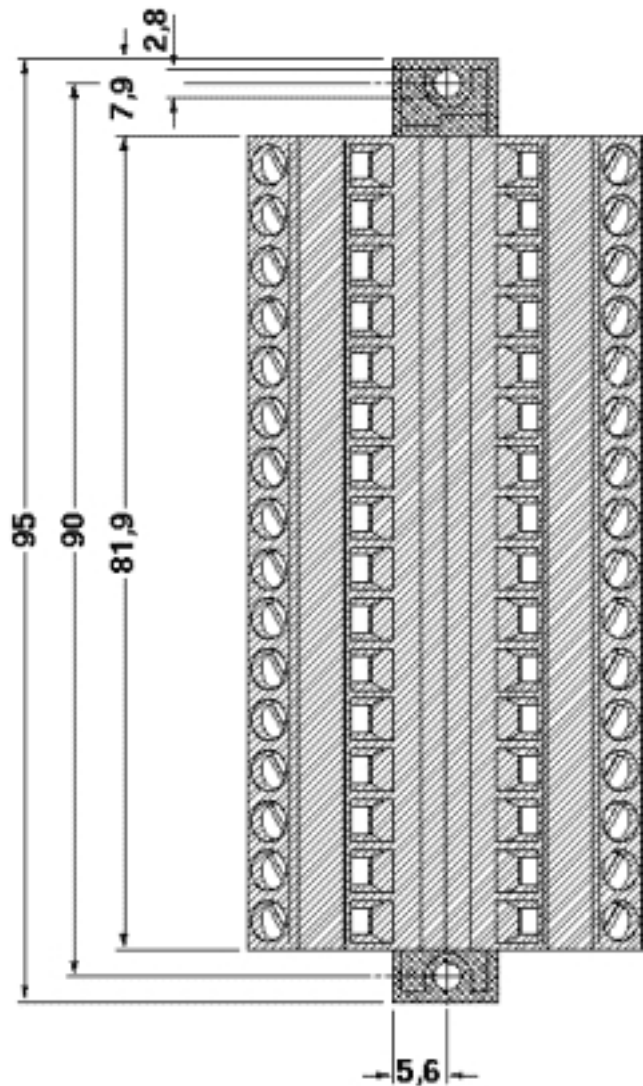

## Approvals

Approvals

Approvals

EAC

Ex Approvals

## Approval details

<https://www.phoenixcontact.com/cn/products/2285467>



## Socket strip - SFLY 2,5/D32 - 2285467

### Approvals

EAC



B.01742

Phoenix Contact 2017 © - all rights reserved  
<http://www.phoenixcontact.com>