

https://www.phoenixcontact.com/cn/products/2285470



Socket strip - SFLY 2,5/F32/ZD - 2285470

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Screw socket, Nominal current: 4 A, Number of positions: 32, Pitch: 5.08 mm, Connection method: Screw connection with tension sleeve, Contact surface: Gold

The illustration shows the version SFLY 2,5/F 32/ZB

Why buy this product

- Easy field connection to connectors according to IEC 60603/DIN 41617
- Well-known connection principle allows worldwide use
- Low temperature rise, thanks to maximum contact force



Key Commercial Data

Packing unit	10 STK
GTIN	
GTIN	4017918055950
Custom tariff number	8536909000
Sales Key	AAAWBA

Technical data

Dimensions

Length	40 mm
Height	35.5 mm
Width	95 mm
Pitch	5.08 mm
Hole diameter	2.8 mm

General

Range of articles	SFLY 2,5
Insulating material group	I
Rated surge voltage (III/3)	4 kV

<https://www.phoenixcontact.com/cn/products/2285470>



Socket strip - SFLY 2,5/F32/ZD - 2285470

Technical data

General

Connection in acc. with standard	EN-VDE
Nominal current I_N	4 A
Nominal voltage U_N	250 V
Nominal cross section	2.5 mm ²
Insulating material	PA
Flammability rating according to UL 94	V2
Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Number of positions	32

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

Standards and Regulations

Connection in acc. with standard	EN-VDE
Flammability rating according to UL 94	V2

Environmental Product Compliance


China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings




Socket strip - SFLY 2,5/F32/ZD - 2285470

Dimensional drawing

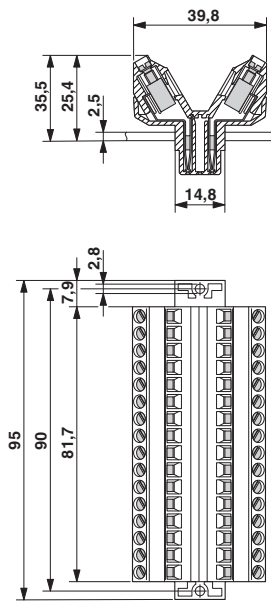

Dimensional drawing

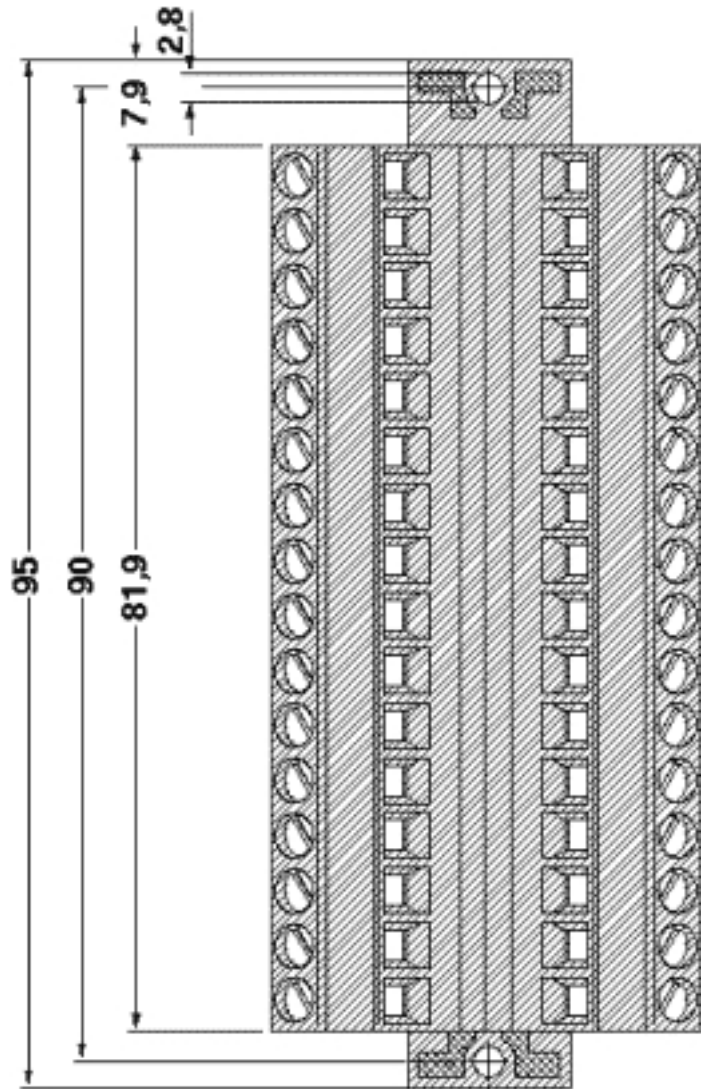

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

<https://www.phoenixcontact.com/cn/products/2285470>



Socket strip - SFLY 2,5/F32/ZD - 2285470

Approvals

EAC	The EAC (Eurasian Conformity) logo, consisting of the letters "EAC" in a bold, stylized font.	B.01742
-----	---	---------

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>