


HSF

NOTES:

Current Rating:0.5A
 Voltage Rating:50V AC/DC
 Contact Resistance:50milliohm Max
 Insulation Resistance:100Megohm Min
 Operation Temperature:-20°Cto+105°C

Housing Material:PA9T+30%G.F(UL94V-0)
 Contact Material:Phosphor Bronze
 Contact plating:Au or Sn over Ni

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

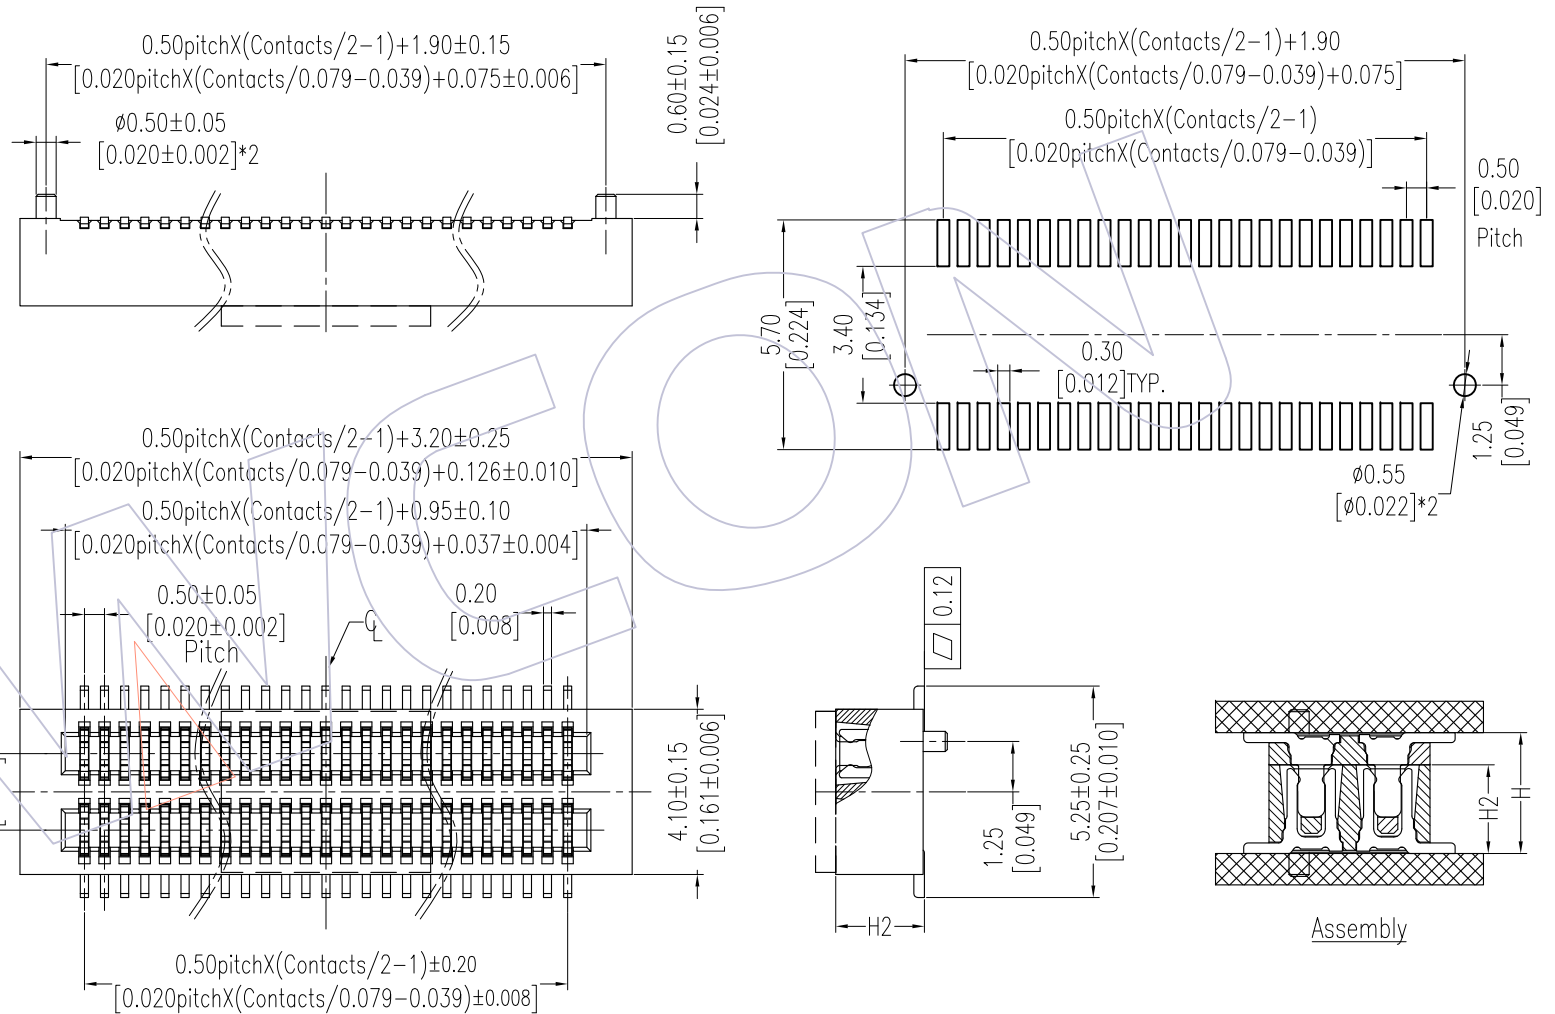


Ordering Information

3620-S XXX - XXX XX R 01

No.of Pins Housing High Contact Plating
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

ASS'Y HIGH(H)	PLUG(H1)	SOCKET(H2)
3.00	0.80	2.20
3.50	0.80	2.70
4.00	1.00	3.00
4.50	1.50	3.00
5.00	2.00	3.00
5.50	1.50	4.00
6.00	2.00	4.00
6.50	2.00	4.50



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW Tsingsn	DATE 2012/10/12	SCALE	FIT mm inch	PART NO. 3620-SXXX-XXXXXR01
				X.X	±0.40					
A1	2012/10/12	Modify	△	X.XX	±0.25	CHECK	DATE	UNIT	A4	TITLE: 0.50mm B TO B FEMALE 180° SMT TYPE
A0	2012/06/27	NEW	—	X.XXX	±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle	± 3'			PROJ.		