

HSF

NOTES:

Rated Current:1.0A

Rated Voltage:100V

Contact Resistance:20mΩ max

Withstand Voltage:250V AC/minute

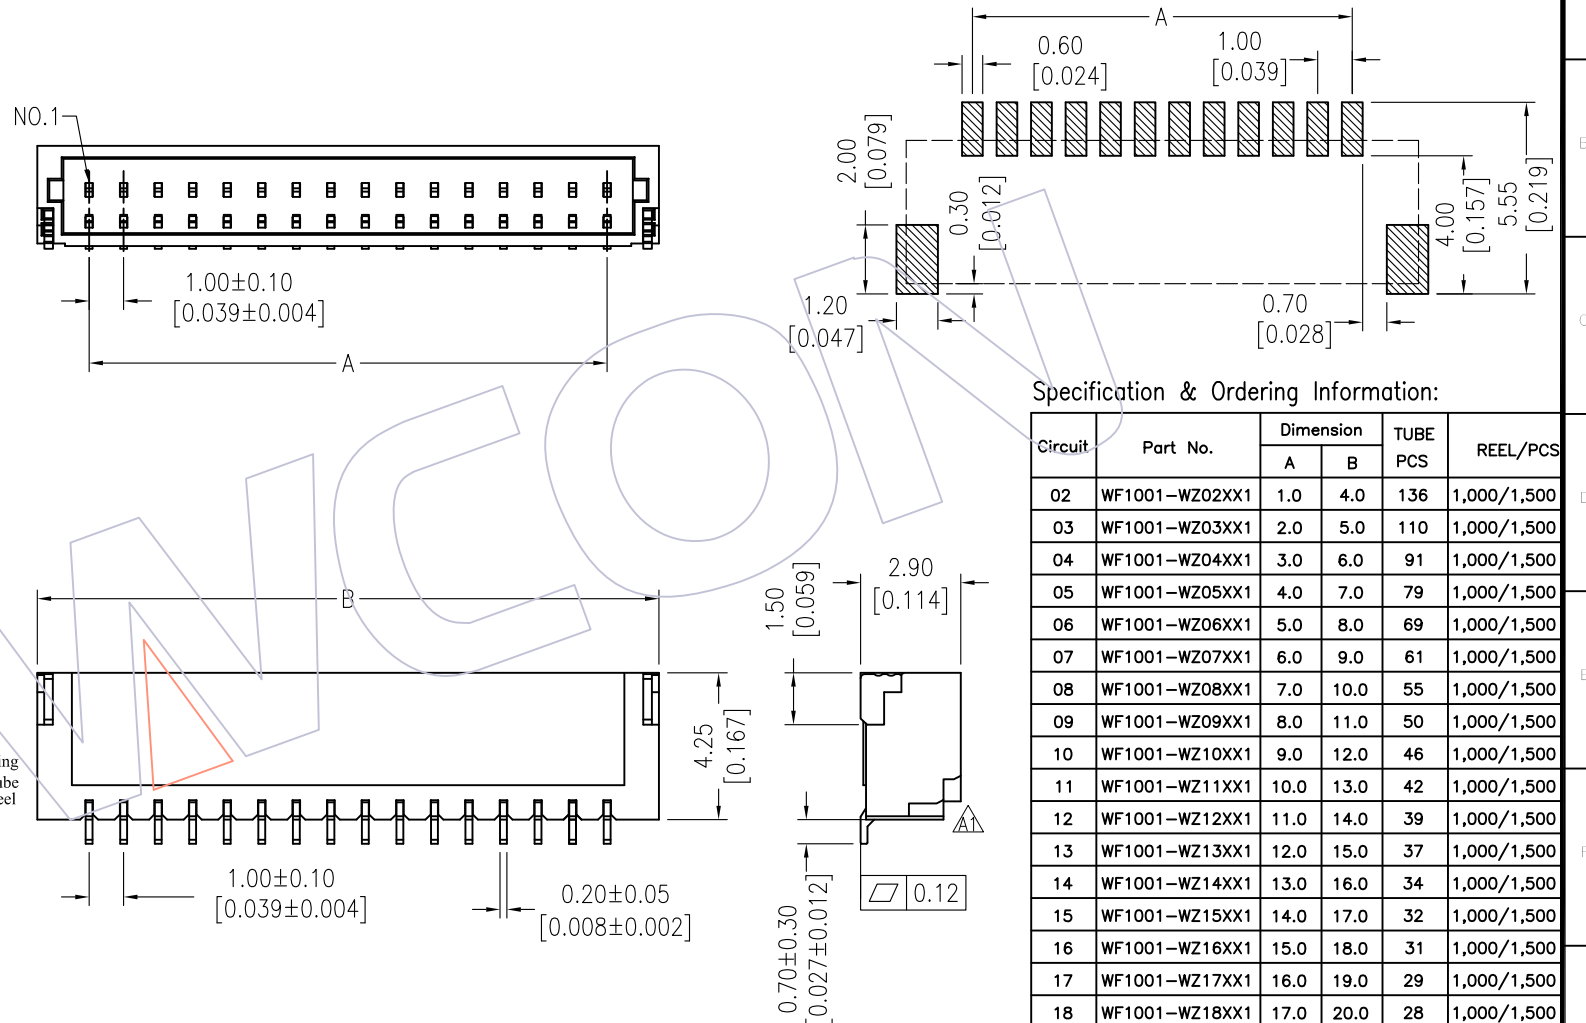
Insulation Resistance:100MΩ min

Operation Temperature:-25℃ to +85℃

Contact Material:Brass

Contact plating:Au Or Sn Over Ni

Insulator Material:PA9T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

WF1001 - WZ XX X X 1

No. of pins
02-20PContact Plating
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
Blank=TinColor
B=Black
T=Natural
W=White
N=BrownPacking
T=Tube
R=Reel

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW tang	DATE 2013/08/13	SCALE UNIT	FIT mm inch	PART NO. SEE TAB	TITLE: "J" TYPE 1.00 WAFER 90° SMT	Customer NO.
				X.X	±0.40							
A1	2013/08/13	Modify		X.XX	±0.25	CHECK	DATE	SIZE	A4			
A0	2012/09/01	NEW		X.XXX	±0.15	APPROVE	DATE	SHEET	1/1			
				Angle DIM	± 3' TOL			PROJ.				