

HSF

NOTES:






Current Rating: 1.0AMP
Contact Resistance: 30mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -55℃ to +130℃

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: LCP+30%G.F UL94V-0

Ordering Information

3640-P XXX - XXX XX R 01

No. of Pins 09-69P High "H1" Contact Plating S0=Gold Flash/Tin T=Tube S3=10u"Gold/Tin P=Tube+CAP S4=15u"Gold/Tin R=Tape&Reel+CAP S5=30u"Gold/Tin Packing

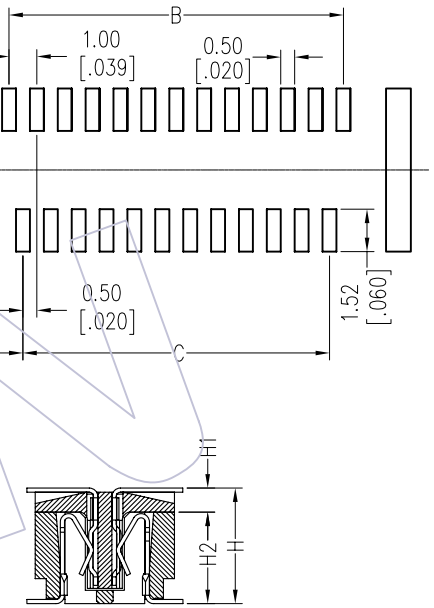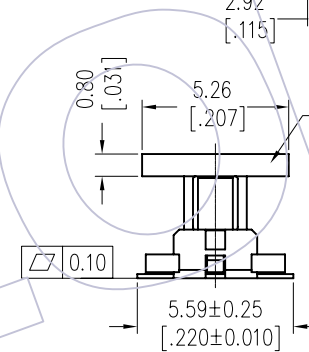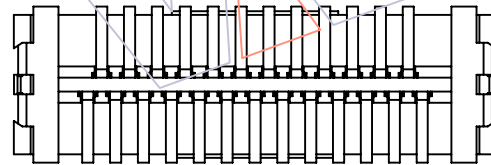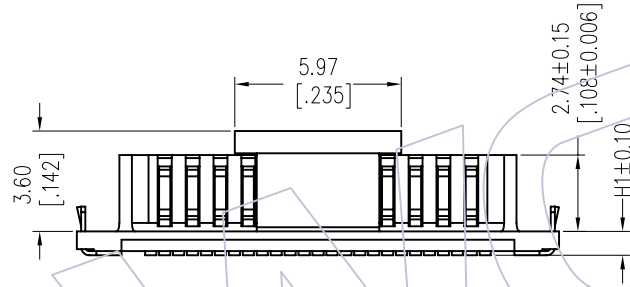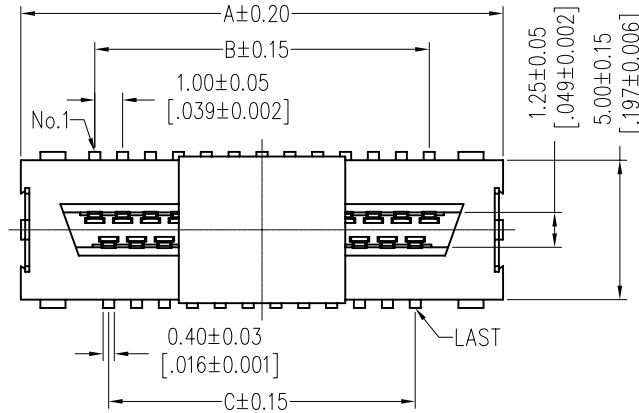

H	H1	H2
Total High	Plug	Socket
4.15	0.86	
4.50	1.23	
5.00	1.73	
5.50	2.23	
6.00	2.72	
7.00	3.72	
7.52	4.23	

No. of Pins	Dimension		
	A	B	C
09	9.30	4.00	3.00
11	10.30	5.00	4.00
15	12.30	7.00	6.00
21	15.30	10.00	9.00
25	17.30	12.00	11.00
31	20.30	15.00	14.00
41	25.30	20.00	19.00
51	30.30	25.00	24.00
69	39.30	34.00	33.00

				OPERATION		DRAW	DATE	SCALE	FIT	PART NO.		
				x.x	±0.40							
				x.xx	±0.25	CHECK	DATE	SIZE	A4	TITLE:		
				x.xxx	±0.15							
				Angle	± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM							
A0	2012/11/22	NEW		-----								

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)