
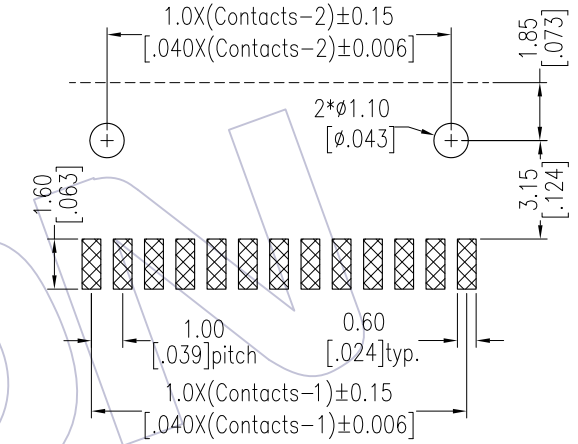


HSF

NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

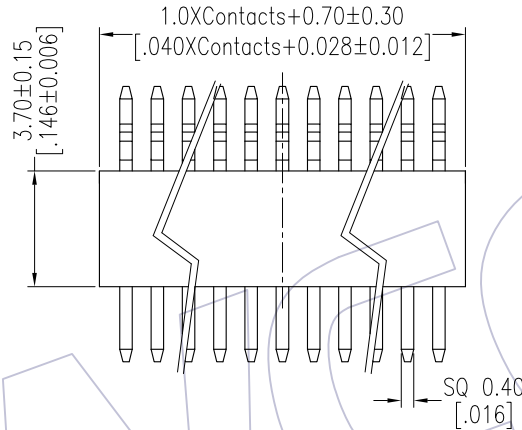


Ordering Information

1537-11 XX XX Z 091 X X

No. of Pins Per Row: 02~50
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, Sn=Tin
 Pin Length
 Packing: A=Tray, 2=Type2, R=Tape&Reel
 1=Type1

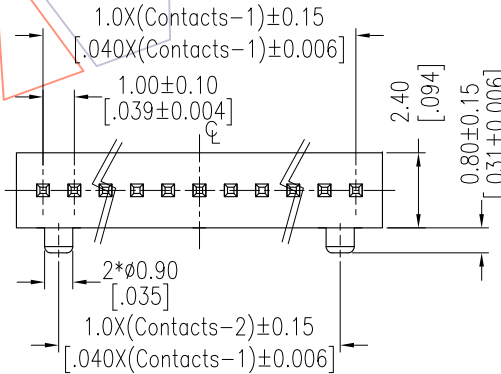

Type1: W/O Post

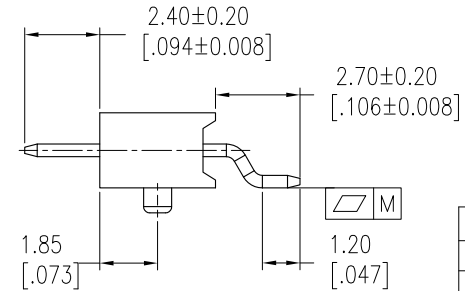

Type2: With Post

PIN数	M
≤15	0.12
>15	0.15

Item	Pitch	Mating
Standard	1.00	2537
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	JYHuang	2013/08/19	UNIT	mm	1537-11XXXXZ091XX
				x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	FH1.00mm SINGLE ROW 90° SMT
				Angle ± 3'			PROJ.		H=3.70(W/O Post/With Post/)
				DIM TOL					Customer NO.