

HSF

NOTES:

Rating Voltage:125V AC/DC

Current Rating:1.0AMP

Contact Resistance:20m Ω max

Withstand Voltage:500V AC/DC

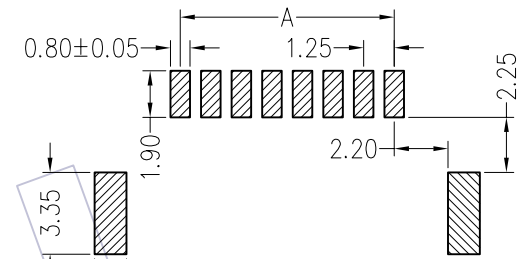

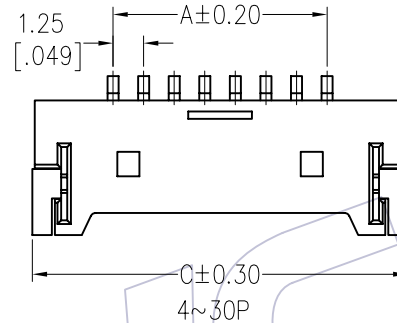
Insulation Resistance:100M Ω min

Operation Temperature:-25℃ to +85℃

Contact Material:Brass

Contact plating:Au Or Sn Over Ni

Insulator Material:PA6T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

Specification & Ordering Information:

Circuit	Part No.	Dimension			Q'ty /Reel
		A	B	C	
02	WF1254-WZ02XR1	1.25	7.65	7.85	2,000
03	WF1254-WZ03XR1	2.50	8.90	9.10	2,000
04	WF1254-WZ04XR1	3.75	10.15	10.35	2,000
05	WF1254-WZ05XR1	5.00	11.40	11.60	2,000
06	WF1254-WZ06XR1	6.25	12.65	12.85	2,000
07	WF1254-WZ07XR1	7.50	13.90	14.10	2,000
08	WF1254-WZ08XR1	8.75	15.15	15.35	2,000
09	WF1254-WZ09XR1	10.00	16.40	16.60	2,000
10	WF1254-WZ10XR1	11.25	17.65	17.85	2,000
11	WF1254-WZ11XR1	12.50	18.90	19.10	2,000
12	WF1254-WZ12XR1	13.75	20.15	20.35	2,000
13	WF1254-WZ13XR1	15.00	21.40	21.60	2,000
14	WF1254-WZ14XR1	16.25	22.65	22.85	2,000
15	WF1254-WZ15XR1	17.50	23.90	24.10	2,000
16	WF1254-WZ16XR1	18.75	25.15	25.35	2,000
17	WF1254-WZ17XR1	20.00	26.40	26.60	2,000
18	WF1254-WZ18XR1	21.25	27.65	27.85	2,000
19	WF1254-WZ19XR1	22.50	28.90	29.10	2,000
20	WF1254-WZ20XR1	23.75	30.15	30.35	2,000
30	WF1254-WZ30XR1	36.25	42.65	42.85	2,000

Ordering Information



WF1254 - WZ XX X X 1

No.of pins
02~15P

Contact Plating
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
Blank=Tin

Color
B=Black
W=White

Packing
A=Tray
T=Tube
R=Reel



				OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
				X.X	$\pm$ 0.40	JYHuang		2012/09/01		UNIT		mm inch		SEE TAB	
				X.XX	$\pm$ 0.25	CHECK		DATE		SIZE		A4		TITLE:	
				X.XXX	$\pm$ 0.15	APPROVE		DATE		SHEET		1/1		"M"TYPE 1.25 Wafer 90° DIP	
AO		2012/09/01		NEW						PROJ.		Customer NO.			
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	Angle DIM	TOL								