


# HSF


NOTES:  
 Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+30%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

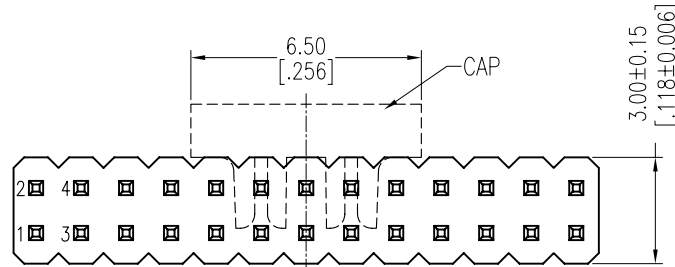

Odd Number


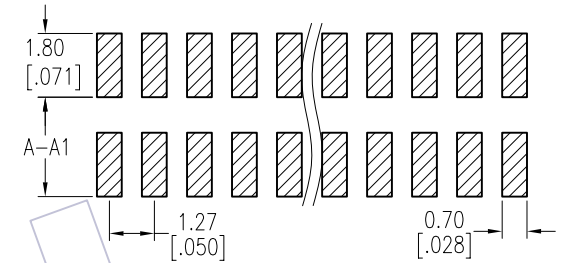


Dual Numbers  $\Delta$

## Ordering Information

1325-12 XX XX Z XXX X 1

No.of Pins	Contact Plating	Pin Length(Short)	Packing
Per Row:02~50	G0=Gold Flash	L=A1+B+2.8	A=Tray
	G3=10u"Gold	Standard:071=7.1	T=Tube
	G4=15u"Gold	082=8.2	P=Tube+CAP
	G5=30u"Gold	092=9.2	R=Tape&Reel+CAP
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		

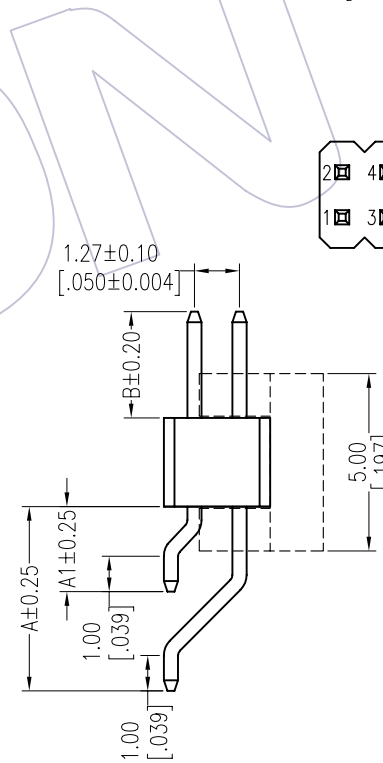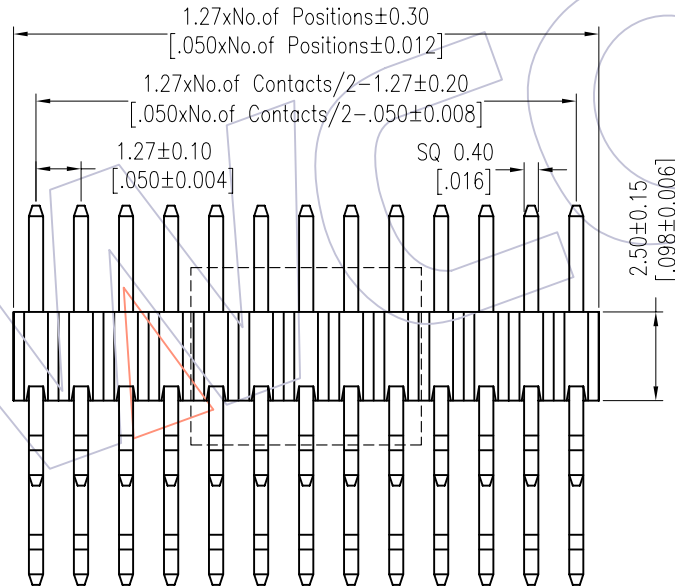

Item	Pin Length	A1	A	B	Mating
Standard	7.10	2.40	5.20	1.90	2321
	8.20	2.40	5.20	3.00	2334
	9.20	2.40	5.20	4.00	2344
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.X ±0.40	William Chen	2013.06.07	UNIT	mm [inch]	1325-12XXXXZXXXXX
A1	2013/06/07	Modify Drawing	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
AO	2012/03/31	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH1.27 DUAL ROW 90° SMT H=2.5
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915 Fax: +86 512 57468468  
 E-mail: sales@wcon.com E-mail: sales@wcon.com