

HSF

NOTES:

Rated Current: 1.0AMP
Contact Resistance: 20mΩ max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min
Operation Temperature: -40℃ to +105℃





Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5232-XX U P XX B N 0 1

No. of Pins	Contact Plating:	Color:
06=6P	S0=Gold Flash/Ni	B=Black
10=10P	S3=10u"Gold/Ni	G=Grey 427C
20=20P	S4=15u"Gold/Ni	E=Grey 413C
30=30P	S5=30u"Gold/Ni	
40=40P	SN=Tin	
50=50P		
60=60P		
80=80P		

Item	Pitch	Mating
Standard	1.27	3130/3132/3230
Alternate		

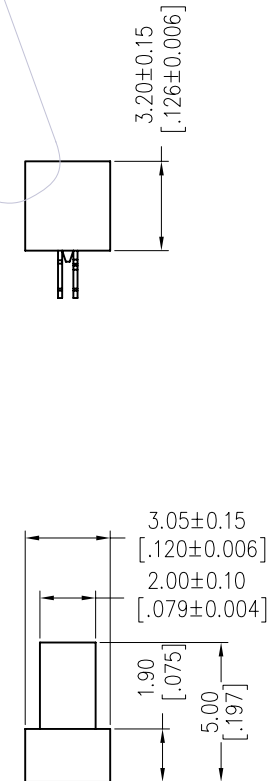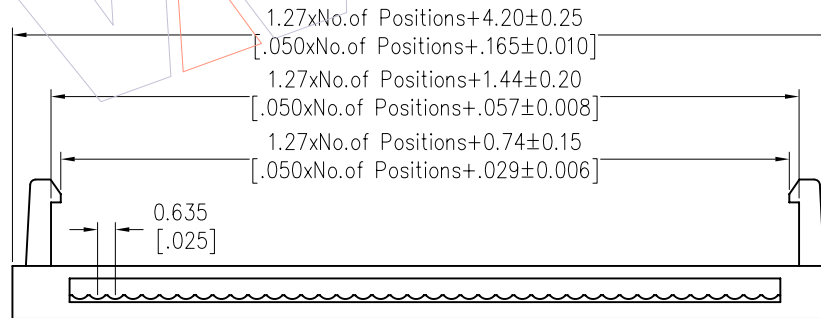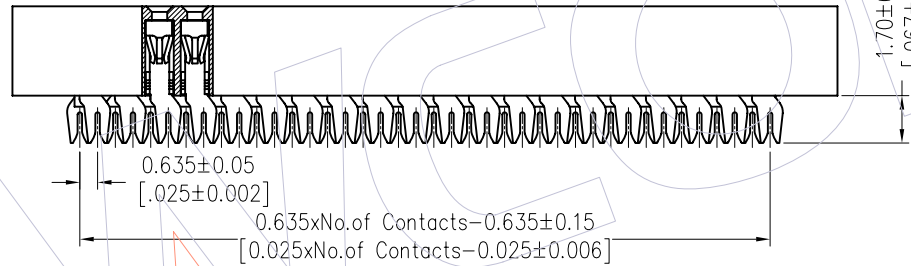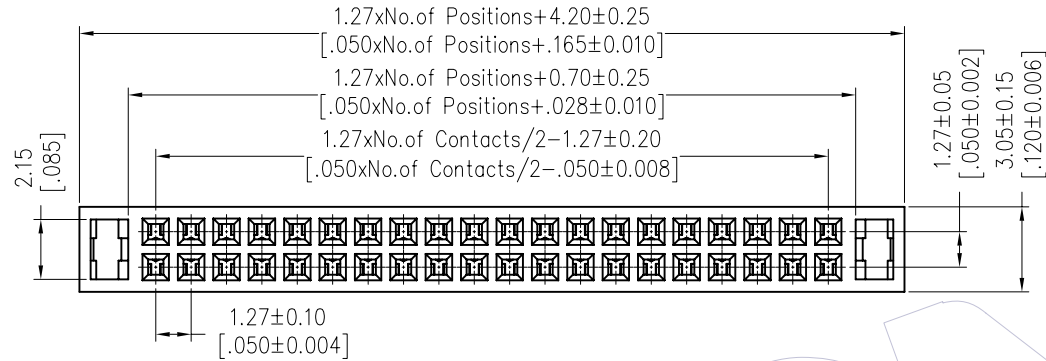

Item		Pitch		Mating		OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
Standard		1.27		3130/3132/3230		X.X		JYHuang		2012/10/10		UNIT		mm		5232-XXUPXXBN01	
Alternate						X.XX		CHECK		DATE		SIZE		A4		TITLE:	
						X.XXX		APPROVE		DATE		SHEET		1/1		Customer NO.	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		DIM		TOL		PROJ.					