

HSF

NOTES:

Current Rating: 1.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulation Resistance: 1000MΩ Min

Operation Temperature: -40℃ to +105℃

Contact Material: Brass

Contact plating: Au Or Sn over Ni


Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

3143-XX S XX B K00 X 1

No.of Pins	Contact Plating	Color	Packing
10 34	G0=Gold Flash	B=Black	T=Tube
14 40	G3=10u"Gold	W=White	
16 44	G4=15u"Gold		
20 50	G5=30u"Gold		
24 60	S0=Gold Flash/Tin		
26 64	S3=10u"Gold/Tin		
30 80	S4=15u"Gold/Tin		
100	S5=30u"Gold/Tin		
	SN=Tin		

Item	Pitch	Mating
Standard	1.27X2.54	5242
Alternate		

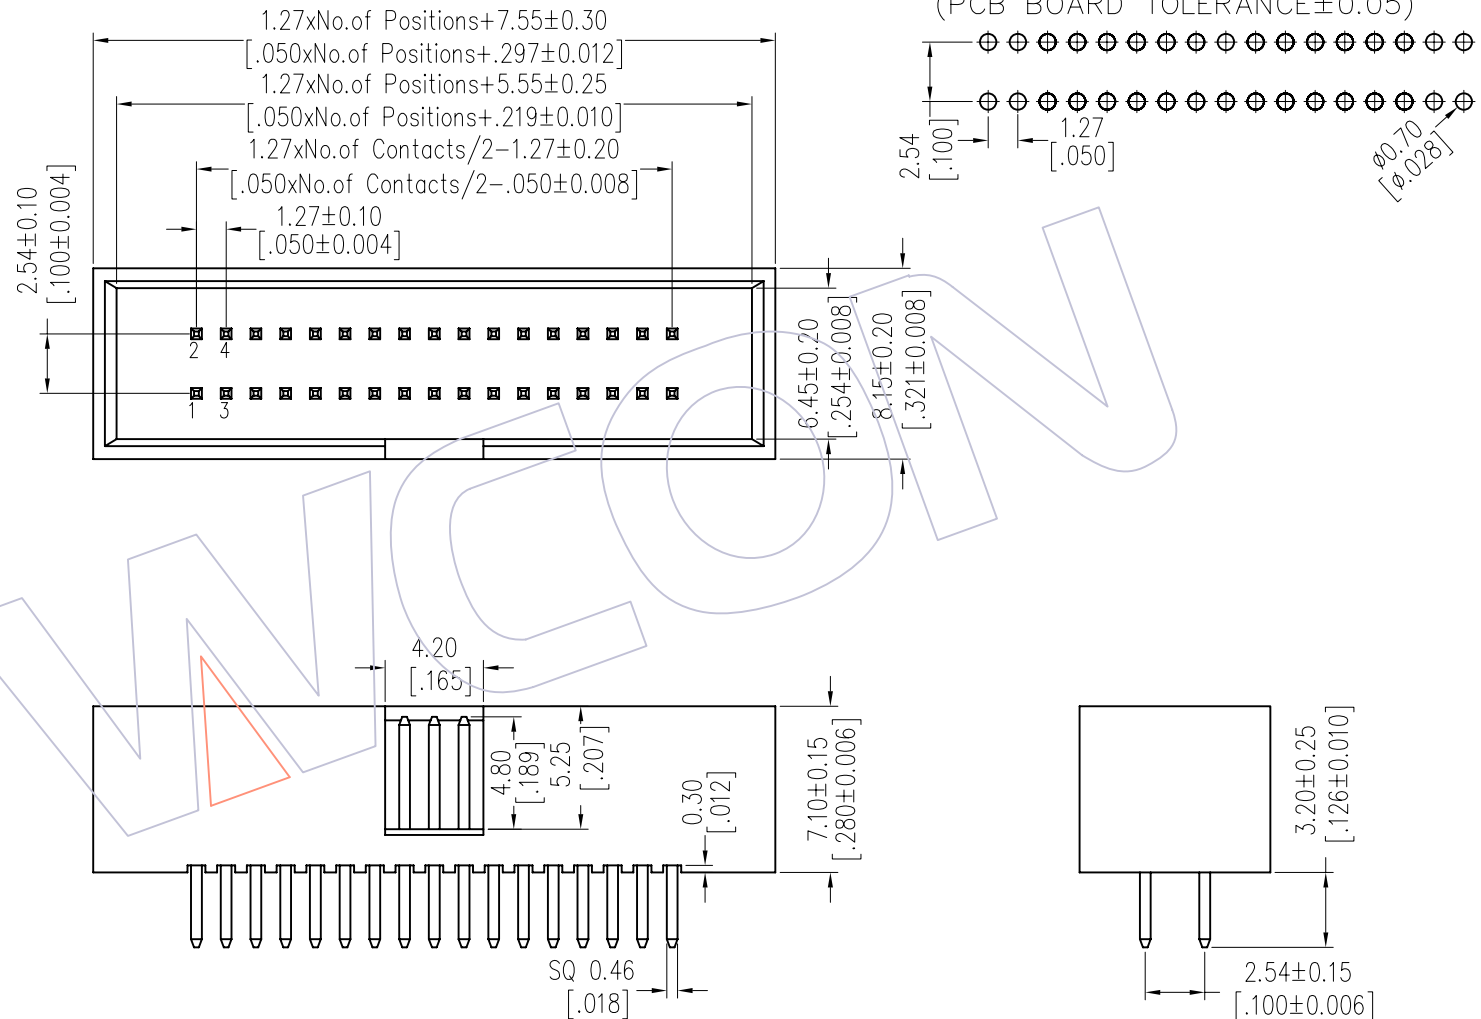

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	JYHuang	2012/09/18	UNIT	mm	3143-XXSXXBK00X1
				x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15			SHEET	1/1	1.27*2.54 BOX HEADER 180° H=7.10
A0	2012/09/18	NEW	-----	Angle ± 3'	APPROVE	DATE	PROJ.	1/1	Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL					