

HSF

NOTES:

Rated Current:1.0AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40℃ to +105℃



Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+30%G.F UL94V-0 BK

Ordering Information



1425-22 XX XX S XXX X X

No. of Pins Per Row:02~50
Contact Plating G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
Pin Length L=A+B+C
Packing A=Tray
Series No. 1=Type 1
2=Type 2
.....


Item	Pin Length	A	B	C	Mating
Standard	---	1.80	2.80	---	2446
	---	1.80	6.00	---	2485
Alternate					

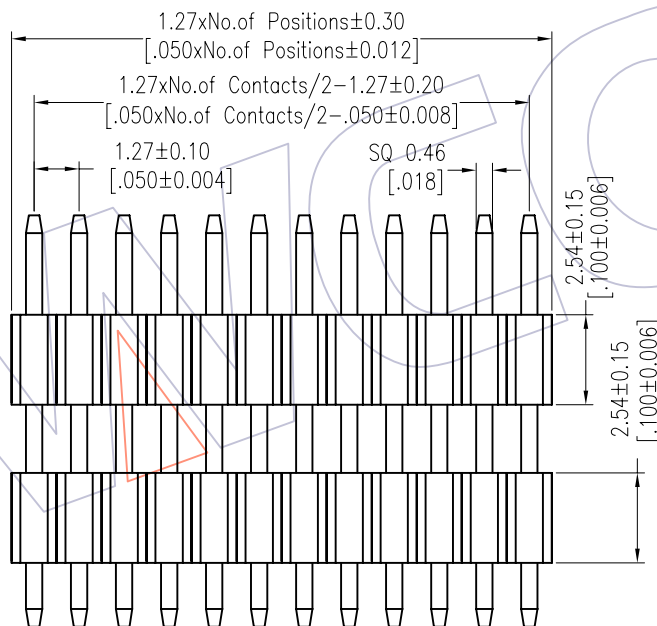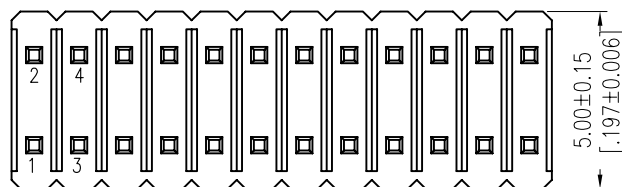

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

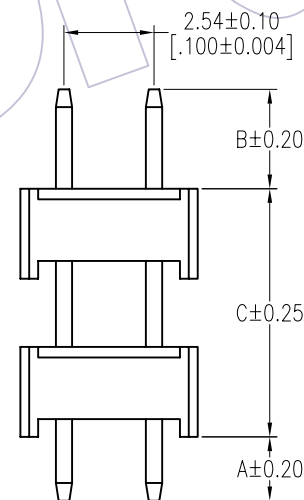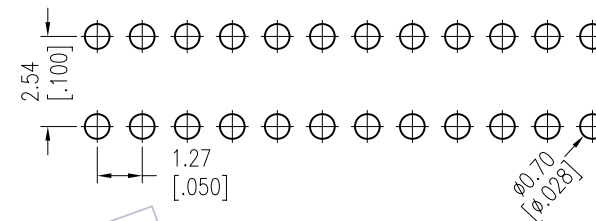

TYPE 1

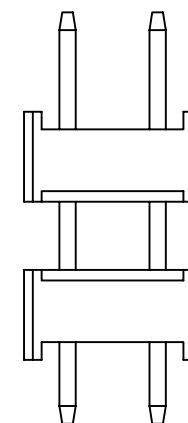

TYPE 2

						OPERATION		DRAW		DATE		SCALE		Fit		PART NO.	
						X.X	±0.40	William Chen		2012.04.06		UNIT		mm		1425-22XXXXSXXXXX	
						X.XX	±0.25	CHECK		DATE		SIZE		A4		TITLE:	
						X.XXX	±0.15					SHEET		1/1		PH1. 27*2.54 DUAL ROW	
						Angle	± 3'	APPROVE		DATE		PROJ.		Customer NO.		DOUBLE PLASTIC 180° H=2.54	
						DIM	TOL										
AO	2012/04/06	NEW		-----													
REV	DATE	MODIFICATION DESCRIPTION		CHANGE													

Http: www.wcon.com
WCON-Dongguan WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com