







# HSF

**NOTES:**

Current Rating:0.5A/Contact  
 Voltage Rating:250V AC  
 Contact Resistance:35milliohm Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:500Megohm Min  
 Operation Temperature:-20°C to +105°C

Housing Material:PBT+30%G.F UL94V-0 BK  
 Cover Material:PBT+30%G.F UL94V-0 BK  
 Terminal Material:Phosphor Bronze  
 Board Lock Material:Phosphor Bronze  
 Terminal plating:Sn-Au over Ni  
 Board Lock plating:Sn over Ni

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

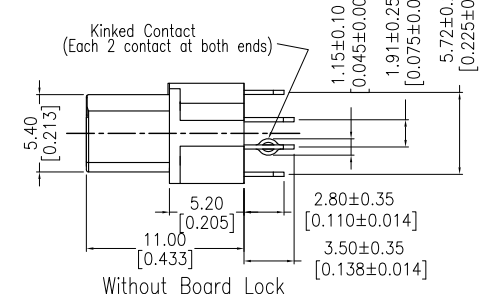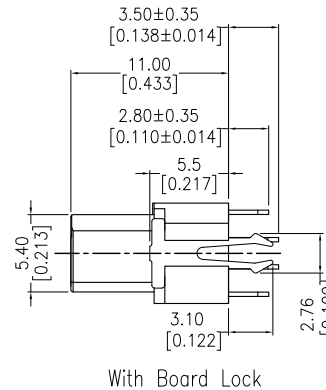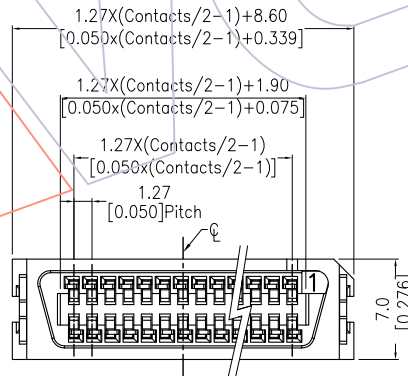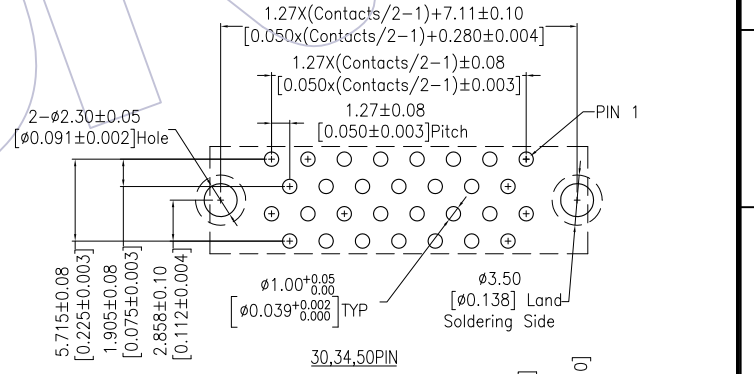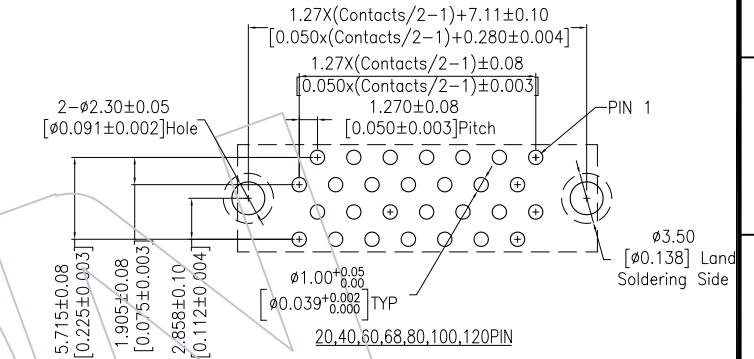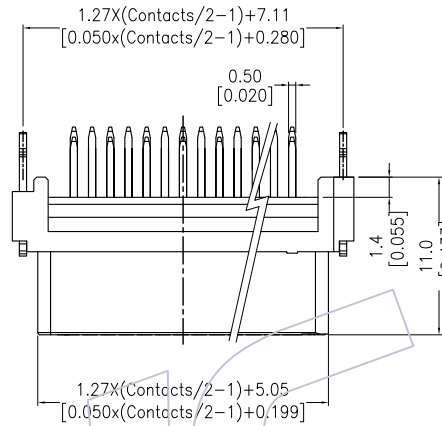

## Ordering Information

6321D-XXX SD XX P X X 01

No.of Pins Contact Plating Type Packing  
 S1=3u"Gold/Tin W:With Board Lock T=Tube  
 S2=5u"Gold/Tin N:Without Board Lock

				OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				X.X ±0.40	Ts insn	2013/02/05	UNIT	mm	6321D-XXXSDXXPXX01
				X.XX ±0.25	CHECK	DATE	SIZE	inch	TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	A4	1.27mm SCSI D-Type
AO	2013/02/05	NEW	-----	Angle ± 3'	APPROVE	DATE	1/1		Female 180° DIP
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL			PROJ.		Customer NO.