

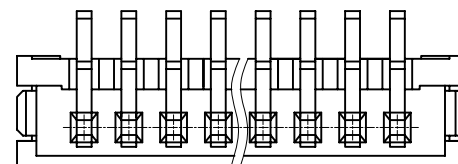
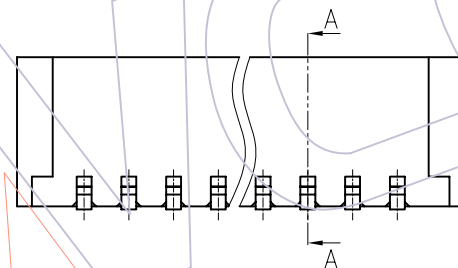


HSF

NOTES:
Rated Current: 1.0AMP
Rated Voltage: 50V AC/DC
Contact Resistance: 20m Ω max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 500M Ω min
Operation Temperature: -25 $^{\circ}$ C to +85 $^{\circ}$ C
Insulator Material: PA6T+30%G.F UL94V-0

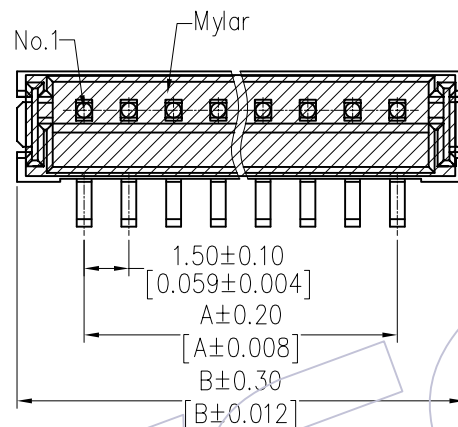

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

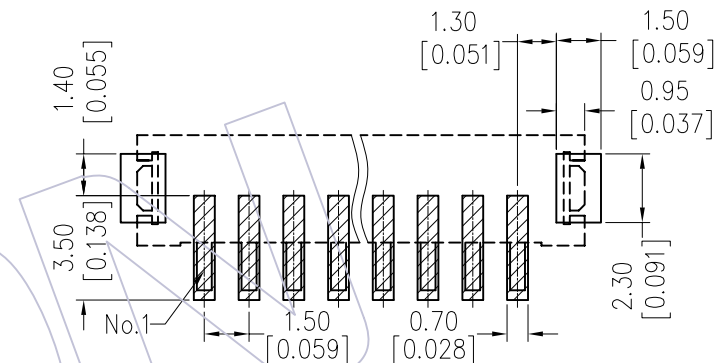

Specification & Ordering Information:

Circuit	Part No.	Dimension		Q'ty /Reel
		A	B	
02	WF1501-WM02XR1	1.50	6.00	1,000
03	WF1501-WM03XR1	3.00	7.50	1,000
04	WF1501-WM04XR1	4.50	9.00	1,000
05	WF1501-WM05XR1	6.00	10.50	1,000
06	WF1501-WM06XR1	7.50	12.00	1,000
07	WF1501-WM07XR1	9.00	13.50	1,000
08	WF1501-WM08XR1	10.50	15.00	1,000
09	WF1501-WM09XR1	12.00	16.50	1,000
10	WF1501-WM10XR1	13.50	18.00	1,000
11	WF1501-WM11XR1	15.00	19.50	1,000
12	WF1501-WM12XR1	16.50	21.00	1,000
13	WF1501-WM13XR1	18.00	22.50	1,000
14	WF1501-WM14XR1	19.50	24.00	1,000
15	WF1501-WM15XR1	21.00	25.50	1,000

Ordering Information

WF1501 - WM XX X R 1

No. of pins
02~15P
Contact Plating
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
Blank=Tin
Color
B=Black
T=Natural
W=White
E=Beige
Packing
R=Reel

				OPERATION		DRAW JYHuang	DATE 2012/09/03	SCALE	FIT	PART NO. SEE TAB	WCON
				X.X	±0.40			UNIT	mm inch		
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: ZH 1.50 WAFER 180° SMT	
				X.XXX	±0.15			SHEET	1/1		
AO	2012/09/03	NEW	—	Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL						

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----