
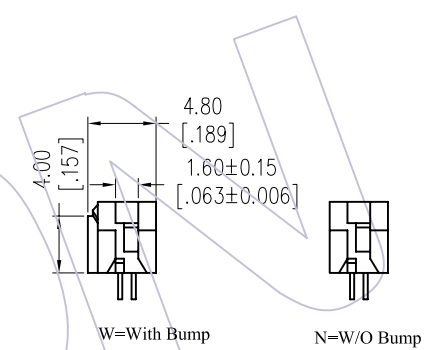
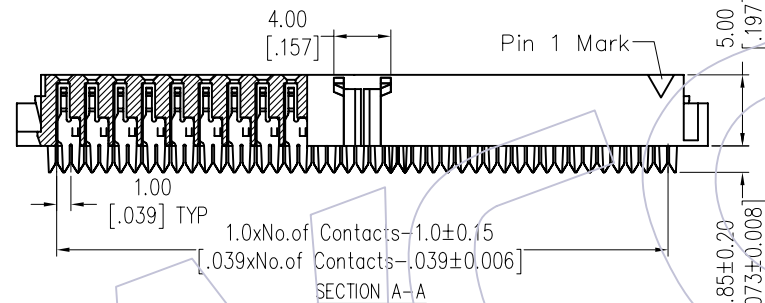



HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

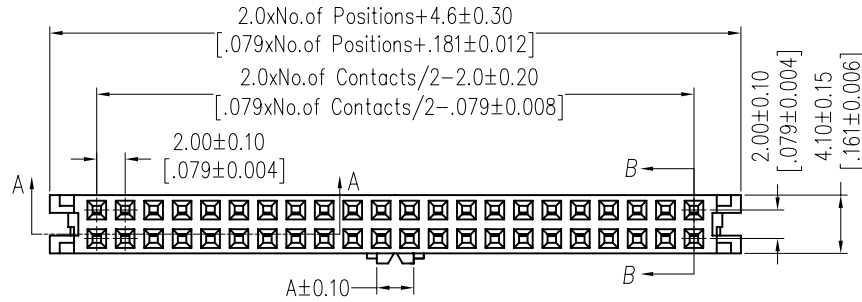

Ordering Information

5224- XX Y P XX B X 01

No. of Pins	Contact Plating	Color Insulator	Bump
06P 26P	S0=Gold Flash/Ni	B=Black	N=W/O Bump
08P 30P	S3=10u"Gold/Ni	G=Grey(427C)	W=With Bump
10P 34P	S4=15u"Gold/Ni	E=Grey(413C)	
12P 36P	S5=30u"Gold/Ni		
14P 40P	SN=Tin		
16P 44P			
18P 50P			
20P 60P			
22P 64P			
24P			

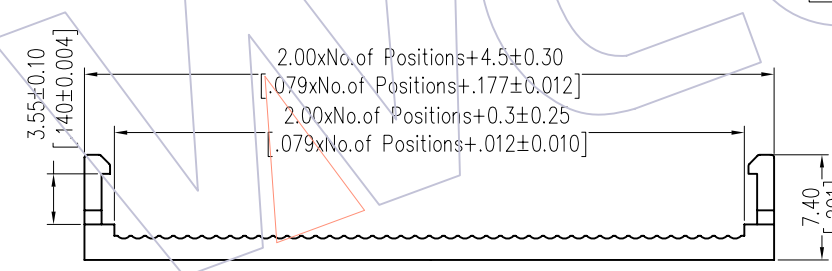

Item	Pitch	Mating
Standard	2.00	3122
Alternate		

Pin No.	DIM"A"
8P~64P	2.60
6P	2.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	JYHuang	2012/10/10	UNIT	mm	5224-XXYPXXBX01
				x.xx ±0.25	CHECK	DATE	SIZE	A4	
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	TITLE:
				Angle ± 3'			PROJ.	Customer NO.	2.00 IDC SOCKET (F TYPE)
				DIM TOL					