

HSF

NOTES:



Rated Current: 1.0AMP
 Contact Resistance: 30mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au Over Ni
 Insulator Material: PBT+30%G.F UL94V-0


Ordering Information

5226 - XX YP XX B W 01





Two Parts Conn+Cover	No. of Pins 10P-50P	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Ni S3=10u"Gold/Ni S4=15u"Gold/Ni S5=30u"Gold/Ni	Color Insulator B=Black G=Grey(427C)
-------------------------	------------------------	---	--

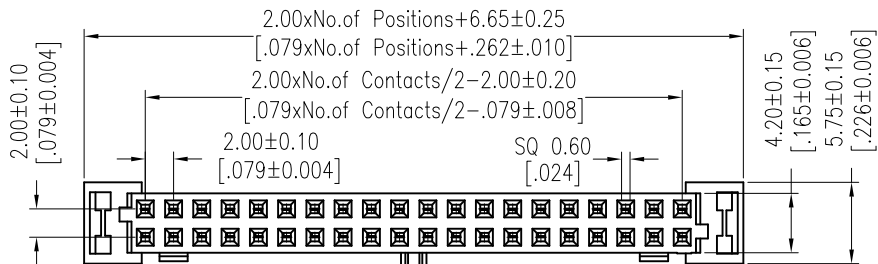

SINGLE RAMP LOCKING ONLY
 (APPLICABLE FOR 10 TO 12 CKT)



POLARIZATION AND RAMP LOCKING
 (APPLICABLE FOR 14 TO 50 CKT)

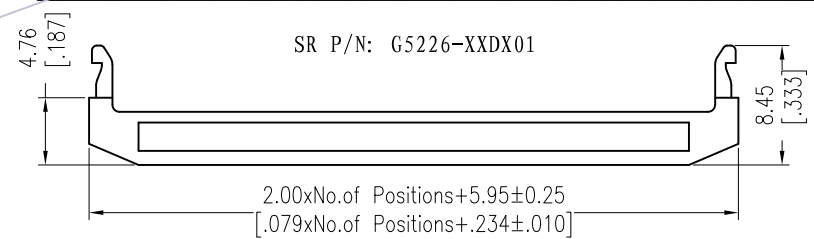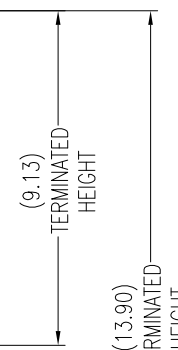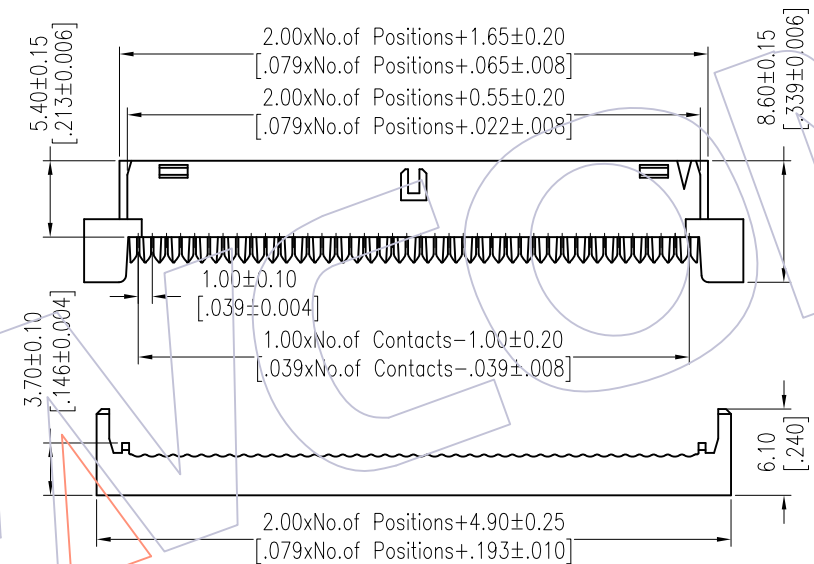

				OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
				X.X	±0.40	Tsingsn		2012/07/28		UNIT		mm		5226-XXYPXXBW01	
				X.XX	±0.25	CHECK		DATE		SIZE		A4		TITLE:	
A1				2012/07/28		MODIFY				SHEET		1/1		2.00mm IDC SOCKET "M" TYPE (WITH RAMP LOCKING)	
A0				2010/09/28		NEW				PROJ.		Customer NO.			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	± 3'	APPROVE	DATE							
					DIM	TOL									