


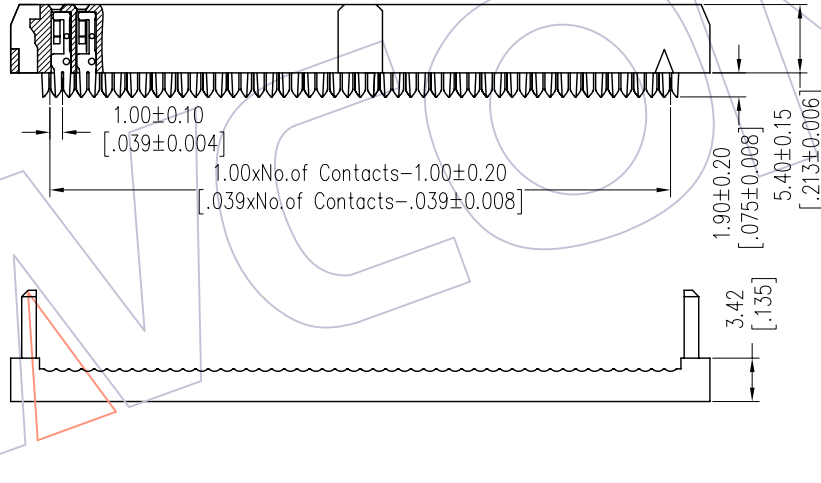



HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

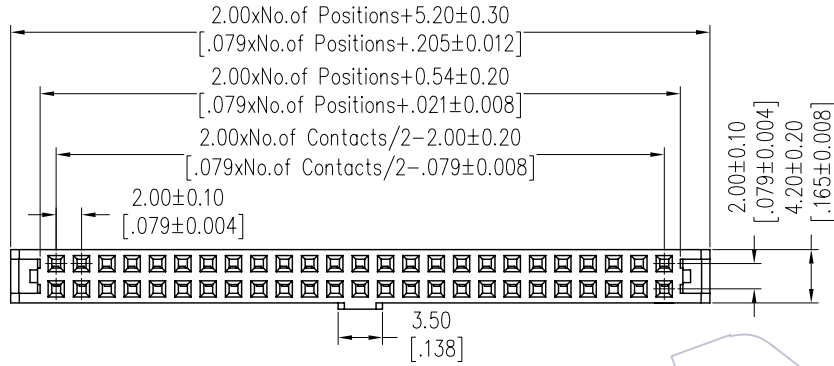



Ordering Information

5222-XX Y P XX B X 0 I

Two Parts Conn+Cover	No. of Pins	Contact Plating	Color	Insulator	Bump
06P 26P	S0=Gold Flash/Ni	B=Black		N=W/O Bump	
08P 30P	S3=10u"Gold/Ni	G=Grey(427C)		W=With Bump	
10P 34P	S4=15u"Gold/Ni				
12P 36P	S5=30u"Gold/Ni				
14P 40P	SN=Tin				
16P 44P					
18P 50P					
20P 60P					
22P 64P					
24P					

Item	Pitch	Mating
Standard	2.00	3111/3220
Alternate		

SR P/N: G5220-XXDX01

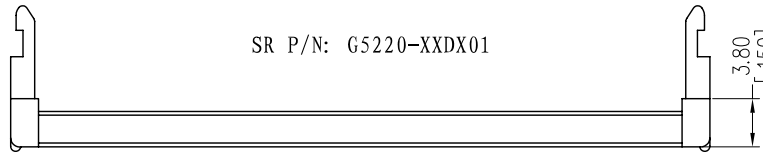

TYPE	PART NO.
TYPE 1	5222-XXYPXXBN01
TYPE 2	5222-XXYPXXBW01

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
X.X ±0.40	JYHuang	2012/10/10	UNIT	mm	SEE TABLE
X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.00 1DC SOCKET+SR (ONE SIDE CONTACT)
X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
Angle ± 3°			PROJ.		
DIM TOL					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
AO	2012/10/10	NEW	-----