

HSF

NOTES:

Current Rating: 1.5AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulation Resistance: 1000MΩ Min



Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze

Contact plating: Au Or Sn over Ni

Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ±0.05)

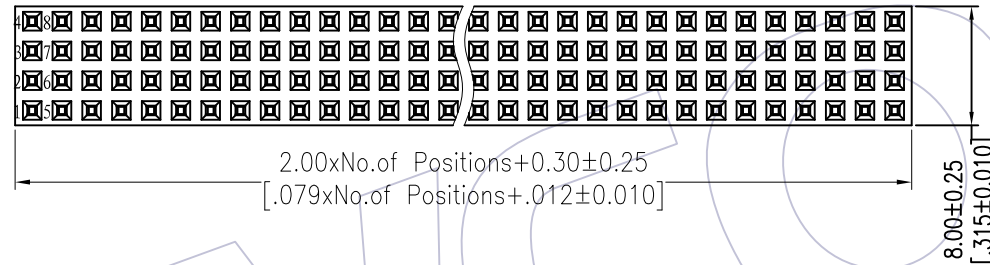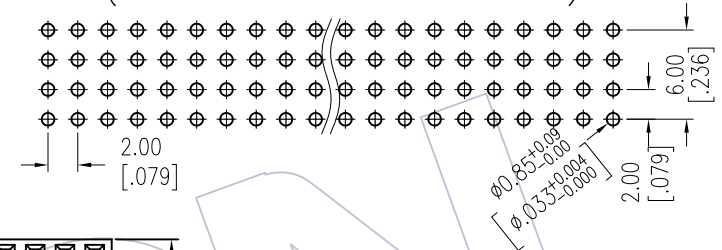

Ordering Information

2293P-4 XX S XX C Y N X 2

No. of Pins per
ROW: 02-40 PIN

Contact Plating:

G0=Gold Flash

G3=10μ"Gold

G4=15μ"Gold

H3=Mating 10u"Gold

Tail 3u"Gold

H4=Mating 15u"Gold



Tail 3u"Gold

Insulator:

C=PA9T

Packing:

T=Tube

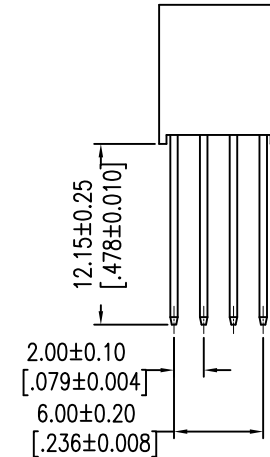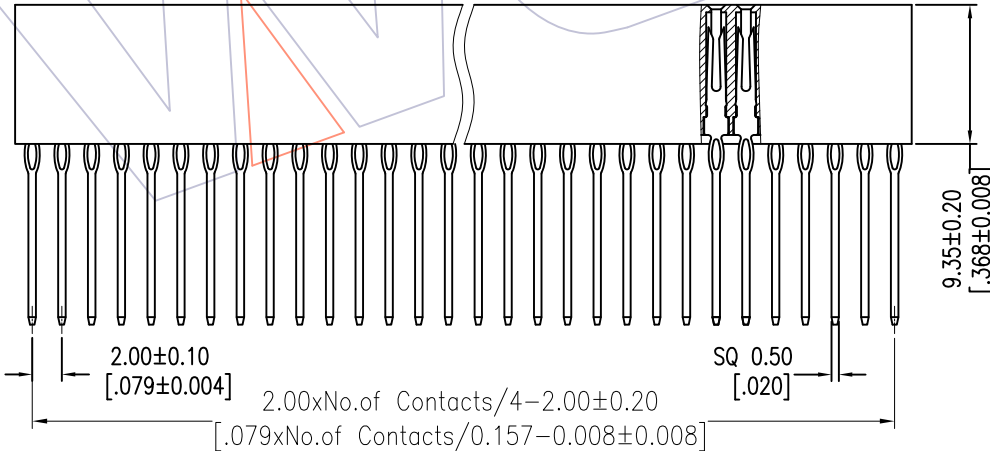

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

				OPERATION		DRAW Wang	DATE 2014/02/09	SCALE UNIT mm	FIT A4	PART NO. 2293P-4XXSXXCYNX2	
				x.x	±0.40					TITLE: FH2.00 FOUR ROW(PC104) 180° PRESS FIT H=9.35	
A1	2014/02/09	Modify drawing		x.xx	±0.25	CHECK	DATE	SIZE	SHEET 1/1	Customer NO.	
A0	2012/07/28	NEW		x.xxx	±0.15						
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle DIM	± 3' TOL	APPROVE	DATE	PROJ.		