

HSF

NOTES:

Current Rating:2.0A AMP
Contact Resistance:10milliohm Max
Withstand Voltage:1000V AC/Minute
Insulation Resistance:1000Megohm Min
Operation Temperature:-25°C to +105°C

Housing Material:PA6T(UL94V-0)
Contact Material:Brass
Contact plating:Sn over Ni Plating


Ordering Information

WF2006A-WZ XX E 01




Terminal Shape
WZ:90° SMT

No.of Pins
02-15P



Colour:
E:Beige

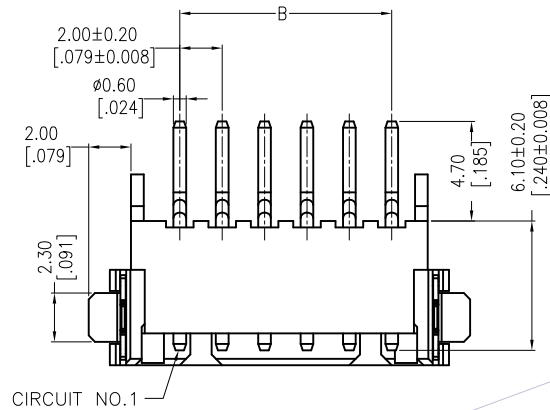


CIRCUIT NO.1

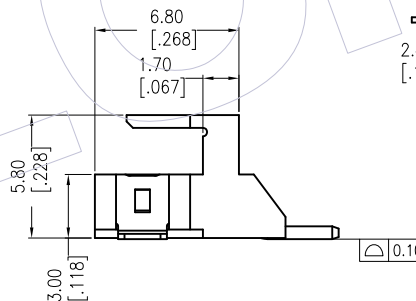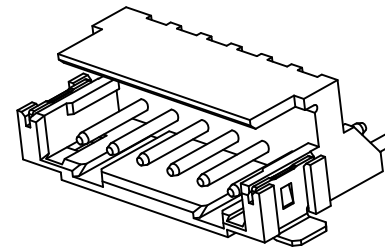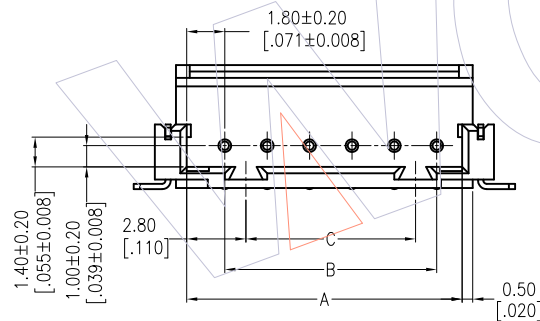

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

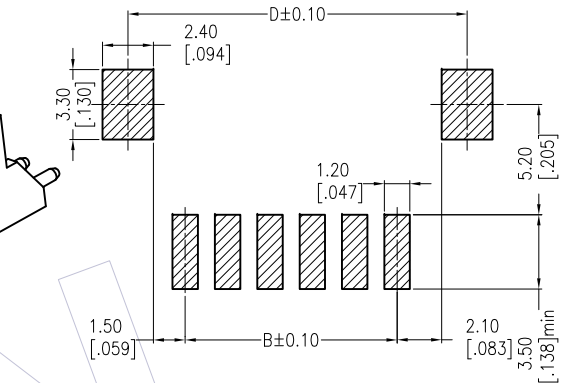

2PIN示意图

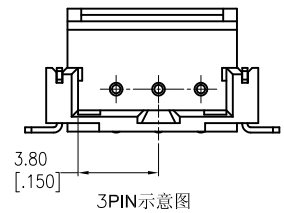

3PIN示意图

15	31.00[1.220]	28.00[1.102]	26.00[1.024]
14	29.00[1.142]	26.00[1.024]	24.00[0.945]
13	27.00[1.063]	24.00[0.945]	22.00[0.866]
12	25.00[0.984]	22.00[0.866]	20.00[0.787]
11	23.00[0.906]	20.00[0.787]	18.00[0.709]
10	21.00[0.827]	18.00[0.709]	16.00[0.630]
9	19.00[0.748]	16.00[0.630]	14.00[0.551]
8	17.00[0.669]	14.00[0.551]	12.00[0.472]
7	15.00[0.591]	12.00[0.472]	10.00[0.394]
6	13.00[0.512]	10.00[0.394]	8.00[0.315]
5	11.00[0.433]	8.00[0.315]	6.00[0.236]
4	9.00[0.354]	6.00[0.236]	4.00[0.157]
3	7.00[0.276]	4.00[0.157]	NA
2	5.00[0.197]	2.00[0.079]	NA
PIN数	A	B	C

				OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
				X.X	±0.40	JYHuang		2015/04/17		mm		A4		WF2006A-WZXXE01	
				X.XX	±0.25	CHECK		DATE		inch				TITLE:	
				X.XXX	±0.15					A4				2.00mm WAFER 2006A 90° SMT	
				Angle	± 3'	APPROVE		DATE		1/1				Customer NO.	
				DIM	TOL					PROJ					
A0	2015/04/17	NEW													
REV	DATE	MODIFICATION DESCRIPTION		CHANGE											