

HSF

NOTES:




Rated Current:2.0AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+30%G.F UL94V-0 BK

Ordering Information


1220-11 XX XX M XXX X X

No. of Pins 02~40
Contact Plating G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
Pin Length L=B+D+2.0+ $\frac{W}{2}$
Standard:063=6.3
073=7.3
083=8.3
Series No.
1=Type 1
2=Type 2
.....
Packing
T=Tube
P=Tube+CAP
R=Tape&Reel+CAP

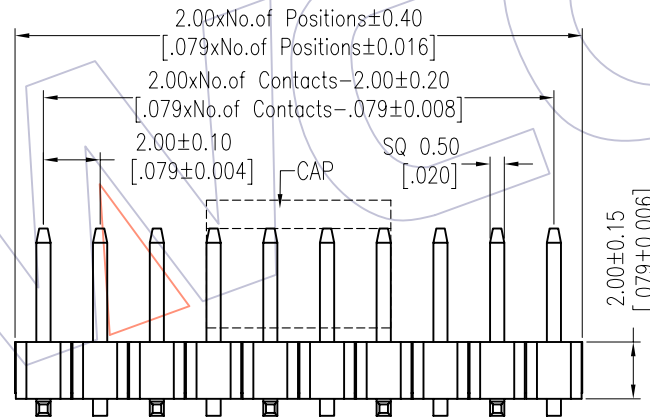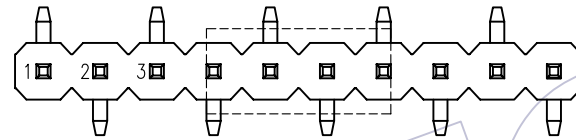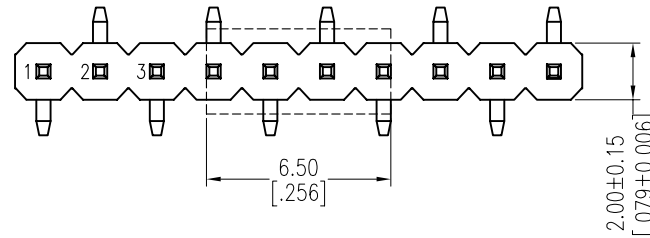


Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

TYPE 1

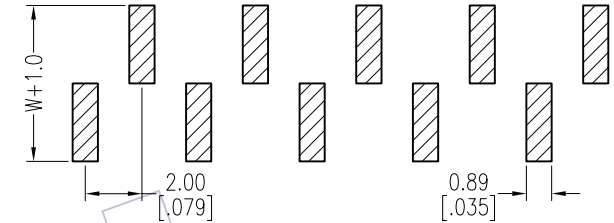

TYPE 2



Item	Pin Length	W	D	B	Mating
Standard	6.30	4.50	0.10	2.00	2220T 2221 2227T 2228
	7.30	4.50	0.10	3.00	2235
	8.30	4.50	0.10	4.00	2240 2243 2263 2272
Alternate					

Item	Pin Length	W	D	B	Mating
Standard	6.30	4.50	0.10	2.00	2220T 2221 2227T 2228
	7.30	4.50	0.10	3.00	2235
	8.30	4.50	0.10	4.00	2240 2243 2263 2272
Alternate					

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	William Chen	2012.04.26	UNIT	mm	1220-11XXXXMXXXXX
X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.00 SINGLE ROW SMT H=2.0
Angle ± 3'			PROJ.		Customer NO.
DIM TOL					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
AO	2012/04/26	NEW	-----

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com