


# HSF



NOTES:  
 Rated Current:2.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+30%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

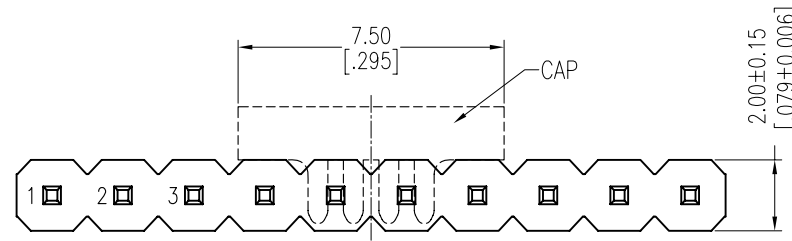

Dual Numbers

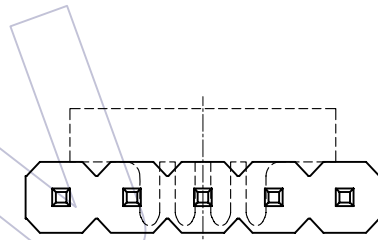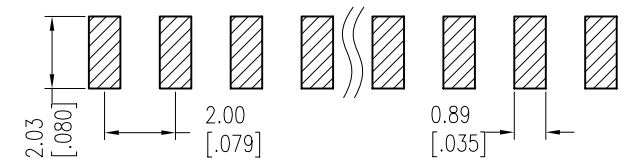

Odd Number

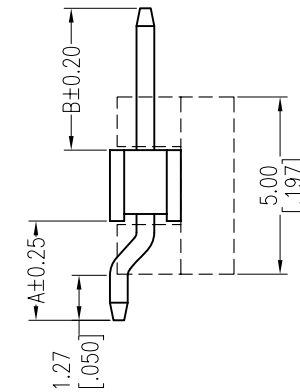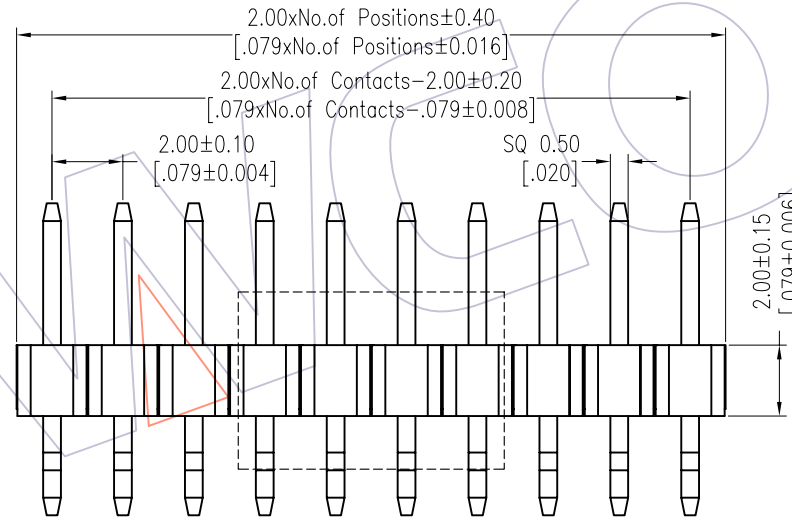

## Ordering Information

1220-11 XX XX Z XXX X 1

No. of Pins	Contact Plating	Pin Length	Packing
02~40	G0=Gold Flash	L=A+B+2.2	A=Tray
	G3=10u"Gold	Standard:069=6.9	T=Tube
	G4=15u"Gold	080=8.0	P=Tube+CAP
	G5=30u"Gold	090=9.0	R=Tape&Reel+CAP
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		

Item	Pin Length	A	B	Mating
Standard	6.90	2.80	1.90	
	8.00	2.80	3.00	
	9.00	2.80	4.00	2240 2243 2263 2272
Alternate				

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
x.X ±0.40	William Chen	2012.04.26	UNIT	mm	1220-11XXXXZXXXXX
x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.00 SINGLE ROW 90° SMT H=2.0
Angle ± 3'			PROJ.		Customer NO.
DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
AO	2012/04/26	NEW	-----