



HSF

NOTES:

Rated Current:2.0AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+30%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

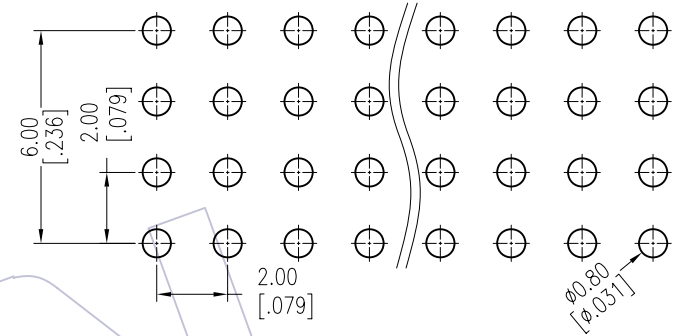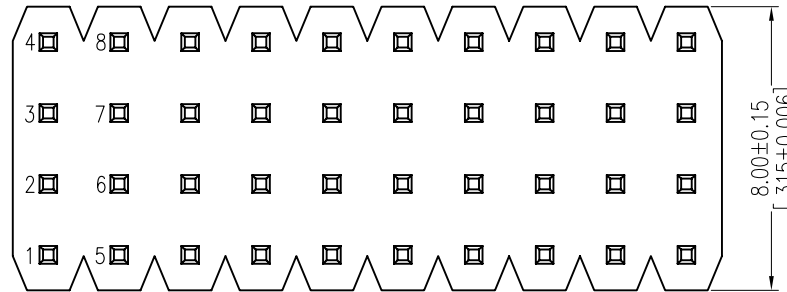

Ordering Information

1220-14 XX XX S XXX X 1

No.of Pins Per Row:04~40
Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin
Pin Length L=A+B+2.0 Standard:088=8.8
Packing 0=PE Bag T=Tube

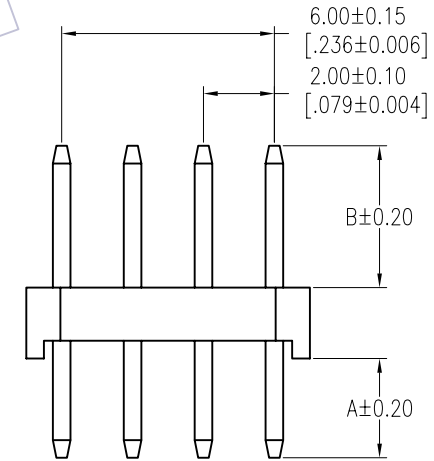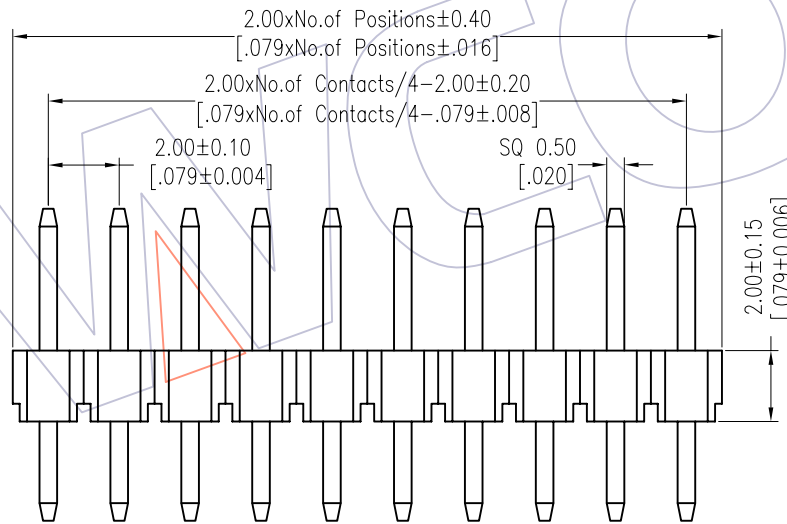

Item	Pin Length	A	B	Mating
Standard	8.80	2.80	4.00	2263
Alternate				

				OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				X.X ±0.40	William Chen	2012.04.26	UNIT	mm	1220-14XXXXSXXXXX
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.00 FOUR ROW 180° H=2.0
				Angle ± 3'					
				DIM TOL					
AO	2012/04/26	NEW			-----				
REV	DATE	MODIFICATION DESCRIPTION			CHANGE				

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com