

HSF

NOTES:

Rated Current:2.0AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40℃ to +105℃


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+30%G.F UL94V-0 BK

Ordering Information


1220-11 XX XX Z XXX X 2

No.of Pins	Contact Plating	Pin Length	Packing
02~40	G0=Gold Flash	L=A+B+2.2	A=Tray
	G3=10u"Gold	Standard:069=6.9	T=Tube
	G4=15u"Gold	080=8.0	P=Tube+CAP
	G5=30u"Gold	090=9.0	R=Tape&Reel+CAP
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		



Item	Pin Length	A	B	Mating
Standard	6.90	2.80	1.90	
	8.00	2.80	3.00	
	9.00	2.80	4.00	2240 2243 2263 2272
Alternate				

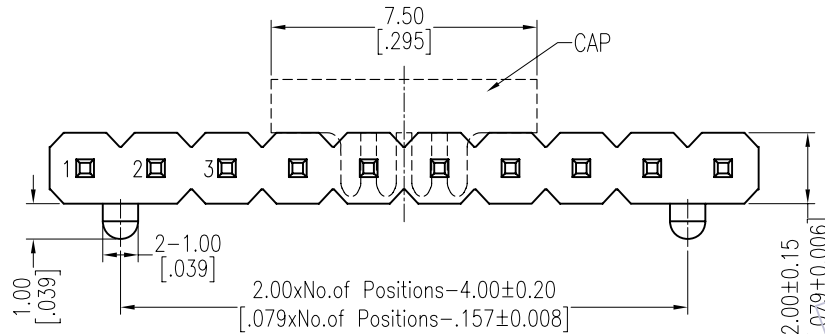


Dual Numbers

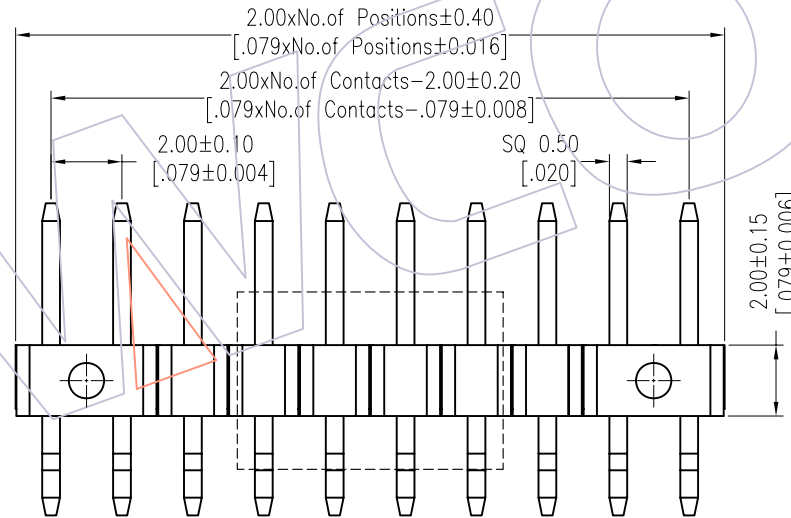

Recommended P.C.B Layout (Top Side) (PCB BOARD TOLERANCE±0.05)

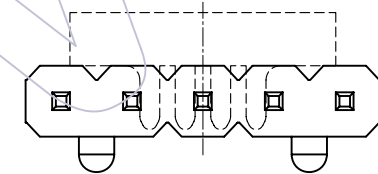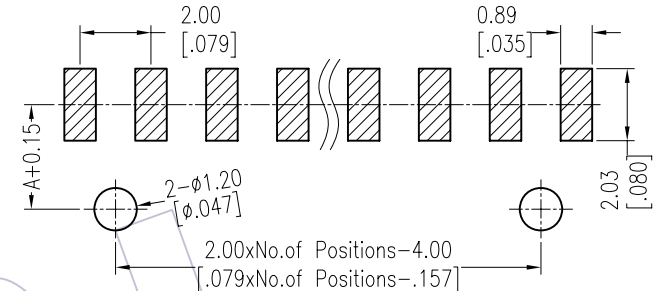

Odd Number

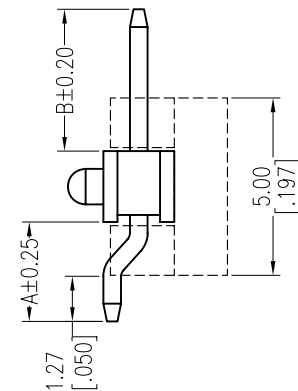

Item	Pin Length	A	B	Mating
Standard	6.90	2.80	1.90	
	8.00	2.80	3.00	
	9.00	2.80	4.00	2240 2243 2263 2272
Alternate				

				OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				X.X ±0.40	William Chen	2012.04.26	UNIT	mm	1220-11XXXXZXXXXX
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.00 SINGLE ROW
				Angle ± 3'			PROJ.		90° SMT H=2.0 WITH POST
				DIM TOL					Customer NO.
AO	2012/04/26	NEW							
REV	DATE	MODIFICATION DESCRIPTION			CHANGE				

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com