

HSF

NOTES:

Rated Current: 2.0AMP

Contact Resistance: 20mΩ max

Withstand Voltage: 500V AC/DC

Insulation Resistance: 1000MΩ min



Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze

Contact Plating: Au Or Sn Over Ni

Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

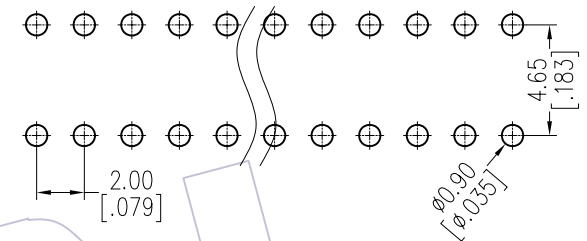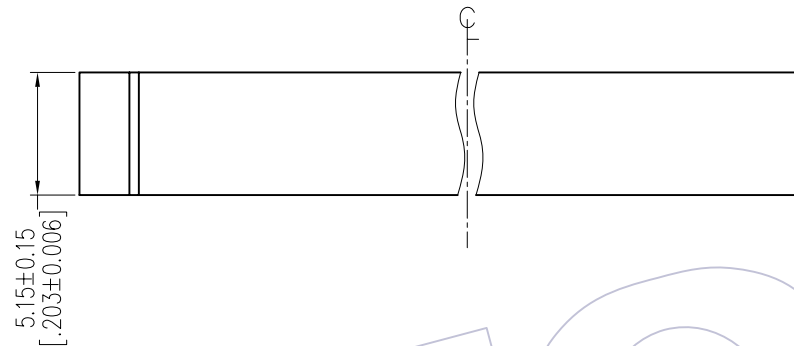



Ordering Information

2249 - 2 XX R XX CUNT 1

No. of Pins per
Row: 02~40Pin

Contact Plating:
G0=Gold Flash
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold
S0=Gold Flash/Tin
S3=10μ"Gold/Tin
S4=15μ"Gold/Tin
S5=30μ"Gold/Tin
SN=Tin
SM=Matte Tin

Packing:
T=Tube
P=Tube+CAP
R=Tube&Reel+CAP

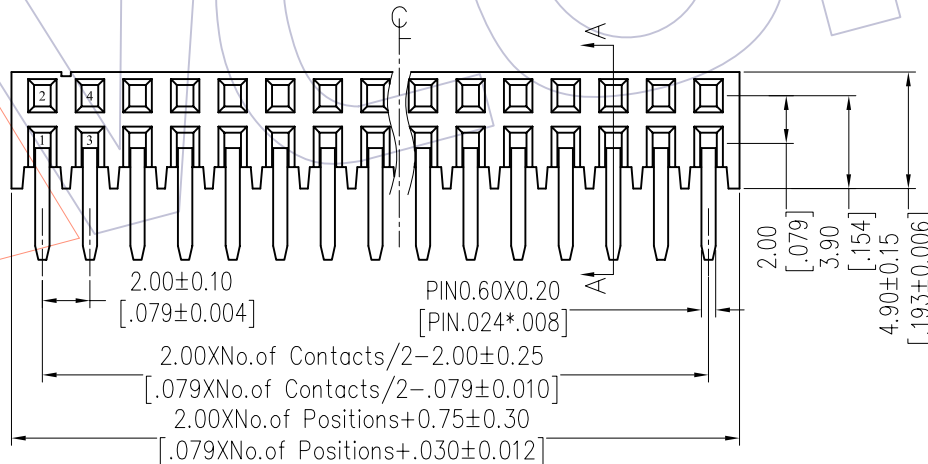

SECTION A-A

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

				OPERATION		DRAW JYHuang	DATE 2012/07/17	SCALE	FIT	PART NO. 2249-2XXRXXCUNT1			
				X.X	±0.40		UNIT	mm	TITLE: FH2.00mm DUAL ROW 90° DIP SIDE INSERT H=4.90				
				X.XX	±0.25	CHECK	DATE	SIZE	A4				
				X.XXX	±0.15			SHEET	1/1				
A0	2012/07/17	NEW	-----	Angle	± 3°	APPROVE	DATE			Customer NO.			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.					