

HSF

NOTES:

Rated Current:1.0A

Rated Voltage:100V AC,DC




Contact Resistance:20m Ω max

Withstand Voltage:800V AC/Minute

Insulation Resistance:1000M Ω min

Operation Temperature:-25℃ to+85℃

Material: PA66 UL94V-0

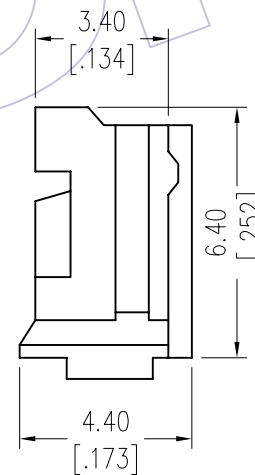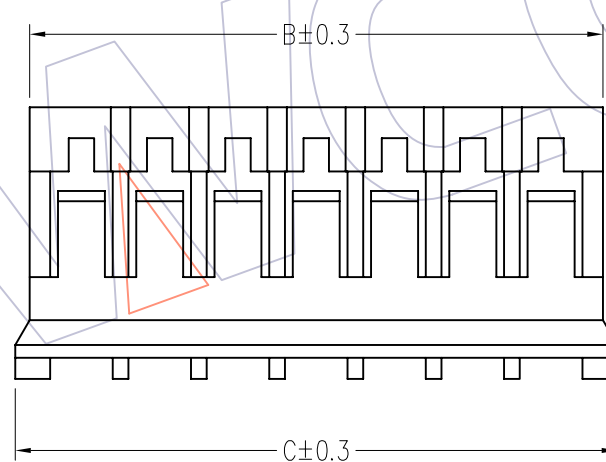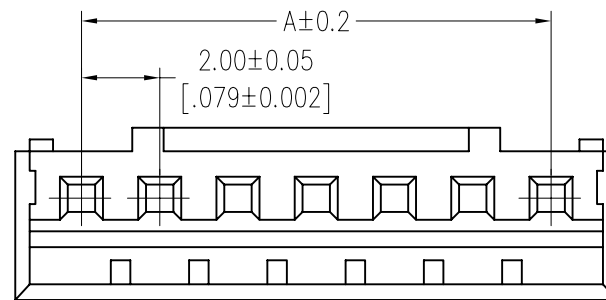

Ordering Information

WF2001 - H XX X 0 1

No. of pins
02pin~20pin

Color
E=Beige
W=White
B=Black
N=Brown

Packing
0=PE Bag

Specification & Ordering Information:

Circuit	Part No.	Dimension			Q'TY/ bag
		A	B	C	
02	WF2001-H02X01	2.0	4.65	5.8	1,000
03	WF2001-H03X01	4.0	6.65	7.8	1,000
04	WF2001-H04X01	6.0	8.65	9.8	1,000
05	WF2001-H05X01	8.0	10.65	11.8	1,000
06	WF2001-H06X01	10.0	12.65	13.8	1,000
07	WF2001-H07X01	12.0	14.65	15.8	1,000
08	WF2001-H08X01	14.0	16.65	17.8	1,000
09	WF2001-H09X01	16.0	18.65	19.8	1,000
10	WF2001-H10X01	18.0	20.65	21.8	1,000
11	WF2001-H11X01	20.0	22.65	23.8	
12	WF2001-H12X01	22.0	24.65	25.8	1,000
13	WF2001-H13X01	24.0	26.65	27.8	1,000
14	WF2001-H14X01	26.0	28.65	29.8	1,000
15	WF2001-H15X01	28.0	30.65	31.8	1,000
16	WF2001-H16X01	30.0	32.65	33.8	1,000
17	WF2001-H17X01	32.0	34.65	35.8	1,000
18	WF2001-H18X01	34.0	36.65	37.8	1,000
19	WF2001-H19X01	36.0	38.65	39.8	1,000
20	WF2001-H20X01	38.0	40.65	41.8	1,000

				OPERATION		DRAW JYHuang	DATE 2012/09/04	SCALE	FIT	PART NO. SEE TAB	
				X.X	±0.40		CHECK	UNIT	$\frac{\text{mm}}{\text{inch}}$		
				X.XX	±0.25	APPROVE	DATE	SIZE	A4	"J"TYPE PH2.0 HOUSING	
AO	2012/09/04	NEW	—	X.XXX	±0.15		DATE	SHEET	1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3'	DIM	TOL	PROJ.			