



# HSF

**NOTES:**

Rated Voltage:250V AC/DC  
 Rated Current:2.0AMP  
 Contact Resistance:10mΩ max  
 Withstand Voltage:800V AC/Minute  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-25℃ to +85℃  
 Insulator Material:PA66 UL94V-0  
 Use With:WF2002-T  
 Matted With:WF2002-Wafer

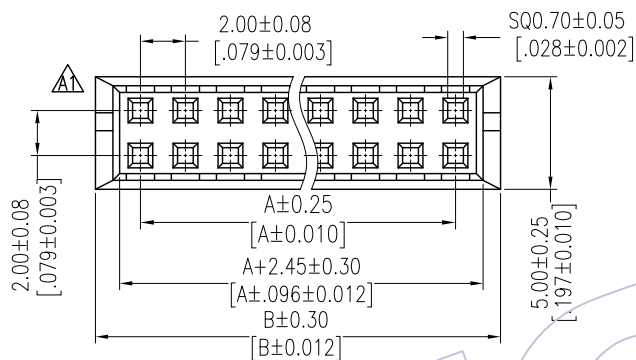

**Specification & Ordering Information:**


Circuit	Part No.	Dimension	
		A	B
04	WF2002-H04X01	2.00	6.00
06	WF2002-H06X01	4.00	8.00
08	WF2002-H08X01	6.00	10.00
10	WF2002-H10X01	8.00	12.00
12	WF2002-H12X01	10.00	14.00
14	WF2002-H14X01	12.00	16.00
16	WF2002-H16X01	14.00	18.00
18	WF2002-H18X01	16.00	20.00
20	WF2002-H20X01	18.00	22.00
22	WF2002-H22X01	20.00	24.00
24	WF2002-H24X01	22.00	26.00
26	WF2002-H26X01	24.00	28.00
28	WF2002-H28X01	26.00	30.00
30	WF2002-H30X01	28.00	32.00
32	WF2002-H32X01	30.00	34.00
34	WF2002-H34X01	32.00	36.00
36	WF2002-H36X01	34.00	38.00
38	WF2002-H38X01	36.00	40.00
40	WF2002-H40X01	38.00	42.00

## Ordering Information



WF 2002 - H XX X 0 1

No. of pins  
04~40Pin

Color  
E=Beige  
W=White



04PIN示意图

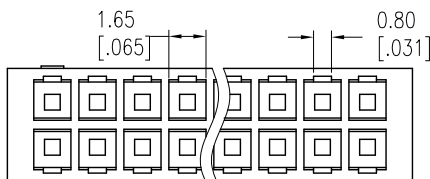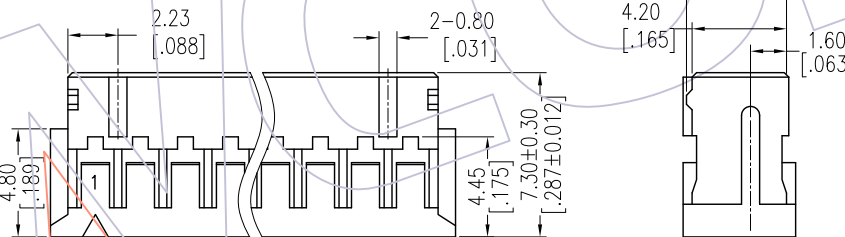

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW JYHuang	DATE 2013/05/04	SCALE	FIT	PART NO. SEE TAB
				X.X	±0.40					
A1	2013/05/04	Modify The Drawing	—	X.XX	±0.25	CHECK	DATE	UNIT mm	SIZE A4	TITLE: PHD2.0mm HOUSING
AO	2012/09/05	NEW	—	X.XXX	±0.15					
				Angle	± 3'	APPROVE	DATE	SHEET 1/1	PROJ.	Customer NO.
				DIM	TOL					