

HSF

NOTES:

Rated Current:2.0AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+30%G.F UL94V-0 BK

Ordering Information

1220-22 XX XX M XXX X X


No. of Pins
Per Row:02~40

Contact Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin



Pin Length
L=B+C+D+ $\frac{W}{2}$
Standard:

Series No.
1=Type 1
2=Type 2
.....


Packing
T=Tube
P=Tube+CAP
R=Tape&Reel+CAP

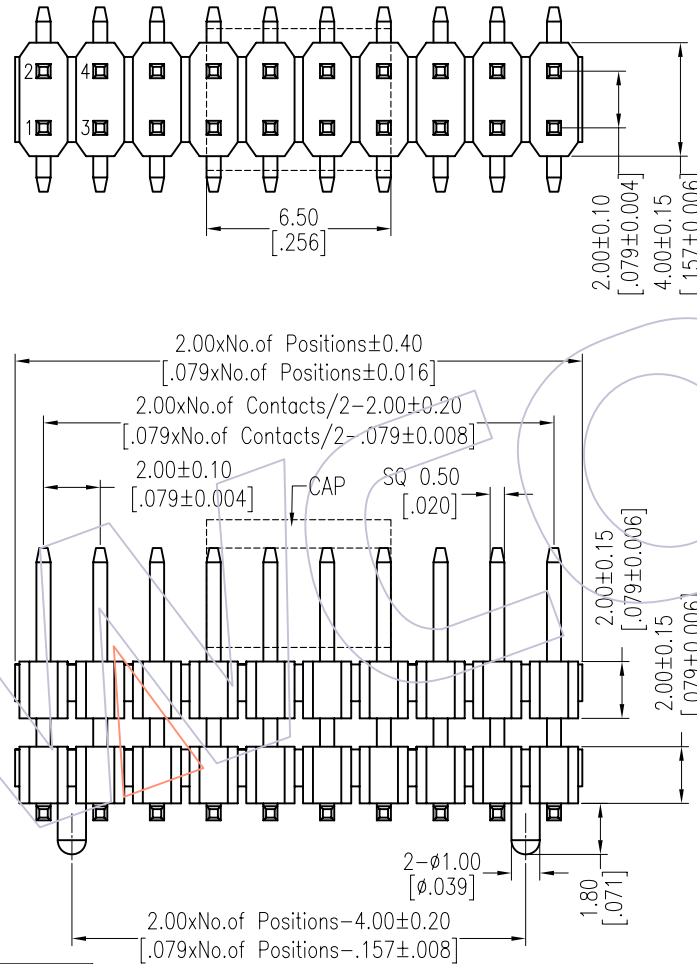

Recommended P.C.B Layout (Top Side) (PCB BOARD TOLERANCE±0.05)

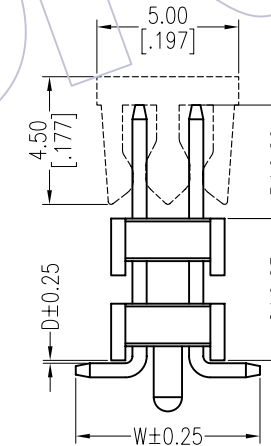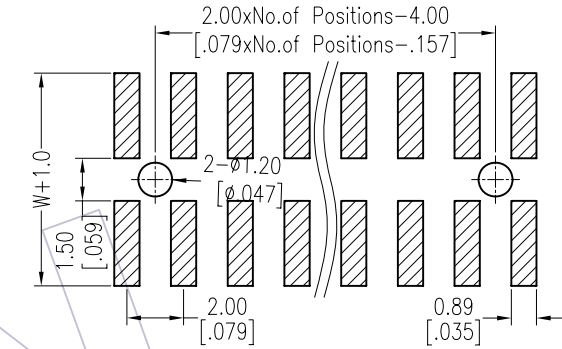

TYPE 2 WITH POST



TYPE 1 W/O POST

Item	Pin Length	W	D	B	C	Mating
Standard	---	6.50	0.10	4.00	---	2240 2243 2263 2272
Alternate						

		OPERATION		DRAW		DATE		SCALE		Fit		PART NO.	
		X.X	±0.40	William Chen		2012.04.26		UNIT	mm			1220-22XXXXMXXXXX	
		X.XX	±0.25	CHECK		DATE		SIZE	A4			TITLE:	
		X.XXX	±0.15	APPROVE		DATE		SHEET	1/1			PH2.00 DUAL ROW DOUBLE PLASTIC SMT H=2.0	
		Angle	± 3'					PROJ.	⌀			Customer NO.	
		DIM	TOL										
AO	2012/04/26	NEW		-----									
REV	DATE	MODIFICATION DESCRIPTION		CHANGE									

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com