

HSF

NOTES:


Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK


Ordering Information

1220-12 XX XX Z XXX X 1

No.of Pins	Contact Plating	Pin Length(Short)	Packing
Per Row:02~40	G0=Gold Flash	L=A1+B+2.2	T=Tube
	G3=10u"Gold	Standard:069=6.9	P=Tube+CAP
	G4=15u"Gold	080=8.0	R=Tape&Reel+CAP
	G5=30u"Gold	090=9.0	
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		


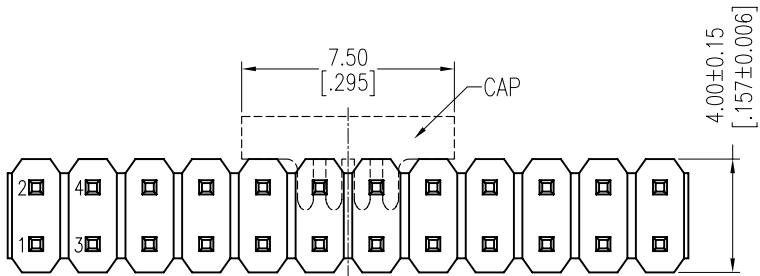


Dual Numbers

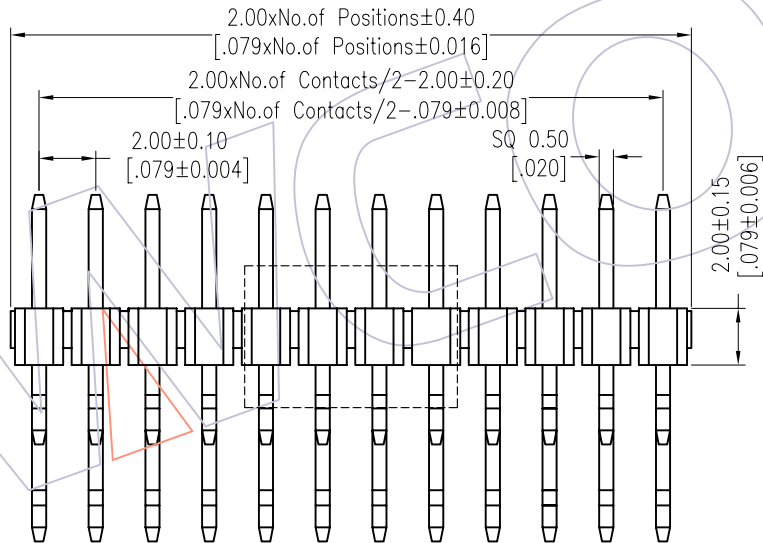


Recommended P.C.B Layout (Top Side)

(PCB BOARD TOLERANCE±0.05)

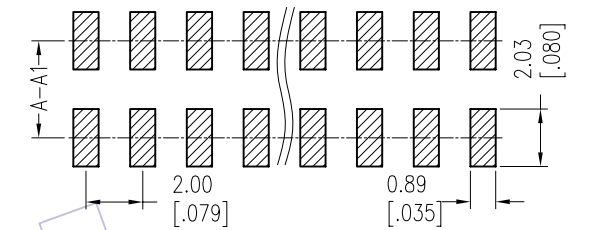

Odd Number

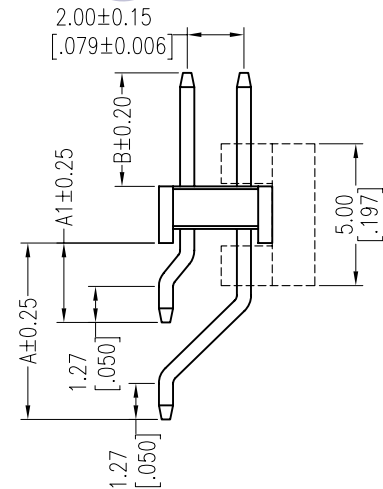

Item	Pin Length	A1	A	B	Mating
Standard	6.90	2.80	6.22	1.90	
	8.00	2.80	6.22	3.00	
	9.00	2.80	6.22	4.00	2240 2243 2263 2272
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.X ±0.40	William Chen	2012.04.26	UNIT	mm	1220-12XXXXZXXXXX
				x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.00 DUAL ROW 90° SMT H=2.0
AO	2012/04/26	NEW	-----	Angle ± 3'			PROJ.	⊕	Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--