

HSF

NOTES:

Current Rating: 1.5AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulation Resistance: 1000MΩ Min

Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze

Contact plating: Au Or Sn over Ni

Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2293P - 4 XX S XX CYN X 1

No. of Pins per
ROW: 02-40PIN

Contact Plating:
G0=Gold Flash
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold
H3=Mating 10u"Gold
Tail 3u"Gold
H4=Mating 15u"Gold
Tail 3u"Gold

Insulator:
C=PA9T







Packing:
T=Tube
0=PE bag



Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW Wang	DATE 2014/02/09	SCALE UNIT	FIT mm	PART NO. 2293P-4XXSXXCYNX1	TITLE: FH2.00 FOUR ROW(PC104) 180° H=9.35 PRESS FIT + ADDITIONAL PLASTIC	Customer NO.
				X.X	±0.40							
A1	2014/02/09	Modify drawing	-----	X.XX	±0.25	CHECK	DATE		A4			
A0	2012/07/28	NEW	-----	X.XXX	±0.15	APPROVE	DATE	SHEET 1/1	PROJ.	Customer NO.		
				Angle	± 3'							
				DIM	TOL							

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

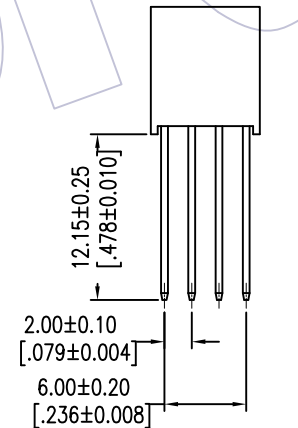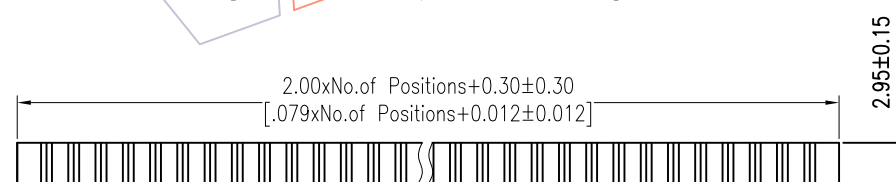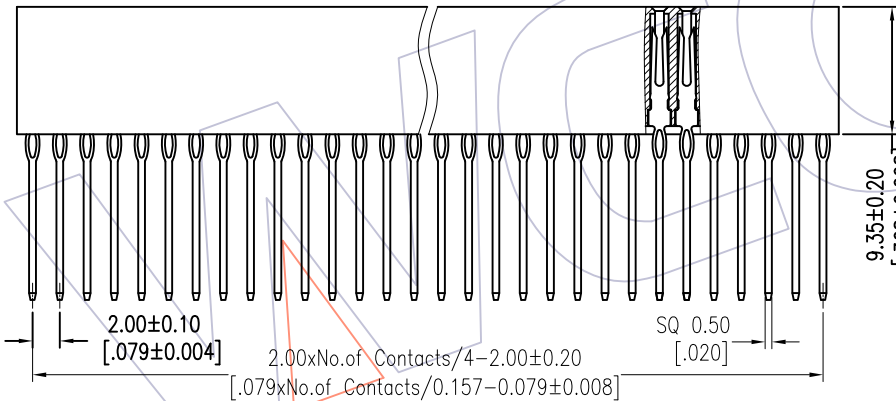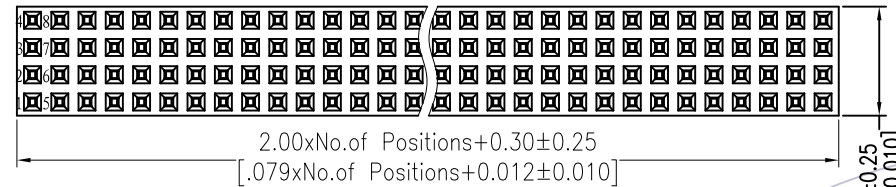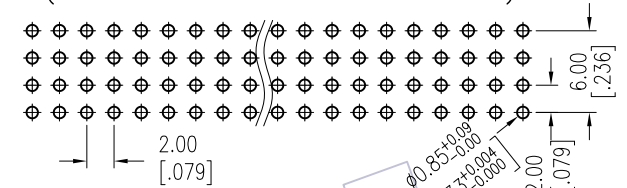

Additional Plastic