

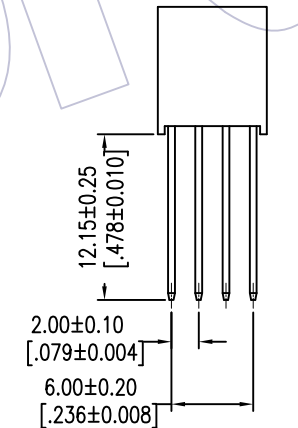
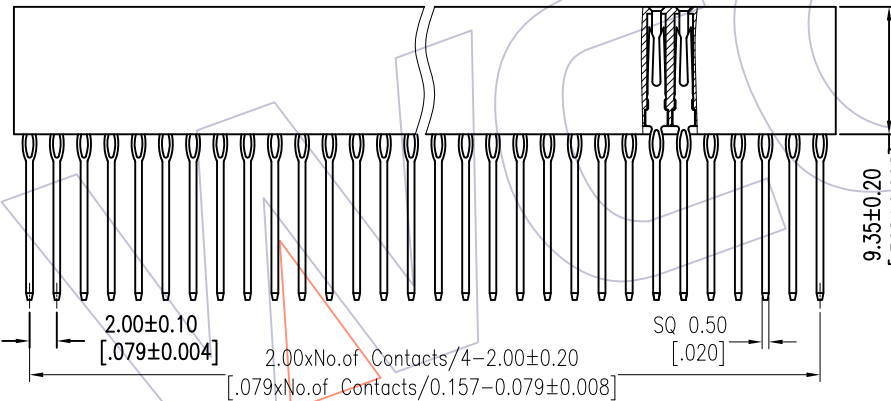
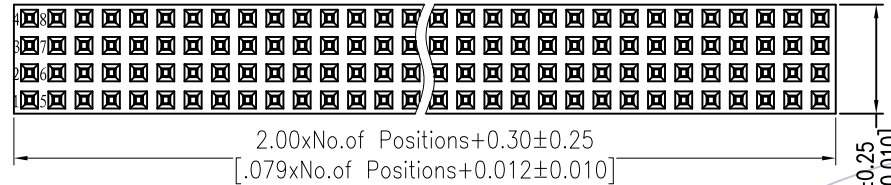


# HSF

NOTES:  
 Current Rating: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

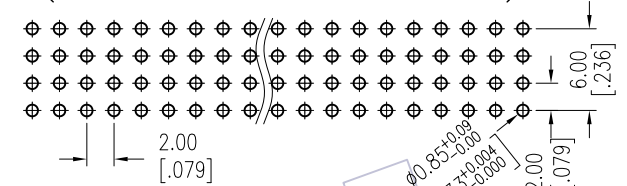

## Ordering Information

2293P - 4 XX S XX CYN X 1

No. of Pins per ROW: 02-40PIN  
 Contact Plating:  
 G0=Gold Flash  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold  
 H3=Mating 10u"Gold Tail 3u"Gold  
 H4=Mating 15u"Gold Tail 3u"Gold  
 Insulator: C=PA9T  
 Packing: T=Tube, O=PE bag

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.X ±0.40	Wang	2014/02/09	UNIT	mm	2293P-4XXSXXCYNX1
A1	2014/02/09	Modify drawing	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.00 FOUR ROW (PC104) 180° H=9.35
A0	2012/07/28	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PRESS FIT + ADDITIONAL PLASTIC
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

Additional Plastic