



HSF

TECHNICAL SPECS:

Current Rating: 1.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 100 cycles
 Mating Pin: Ø0.40 to Ø0.56mm
 Forces: (polished steel gauge Ø0.43mm)
 Insertion: 200g Max/Pin, Withdrawal: 60g Min/Pin
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000), Sn over Ni
 Contact Clip(4 finger): BeCu(C17200), Au or Sn over Ni
 Insulator Material: PPS+30%G.F(UL94V-0)
 24P~32P Insulators with center one bar
 36P~48P Insulators with center two bar


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

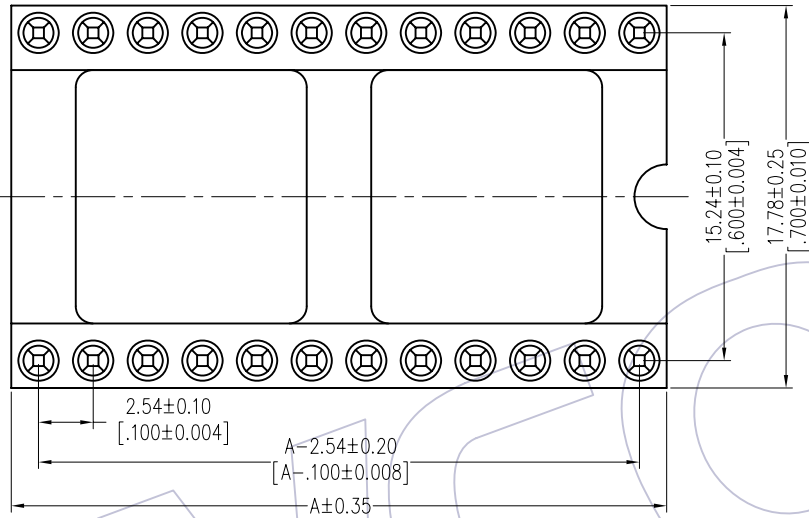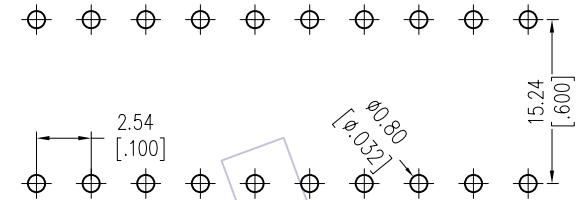

Ordering Information

7110-302 XX S XX 074 X 1

Row of Pitch 2=15.24mm
 No. of Pin See tab
 Contact Plating S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
 Packing T=Tube, A=Tray

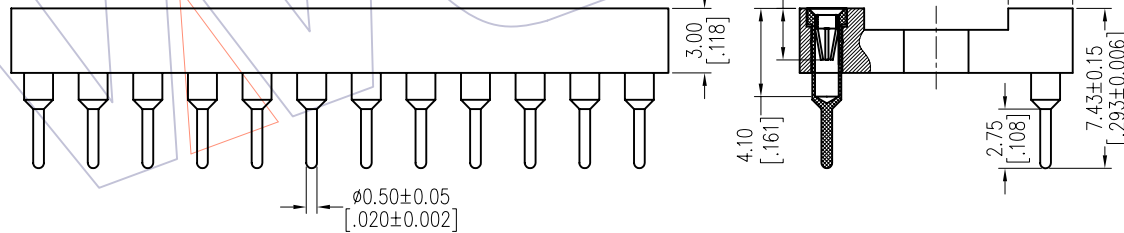

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim
		A
24	7110-30224SXX074X1	30.48
28	7110-30228SXX074X1	35.56
32	7110-30232SXX074X1	40.64
36	7110-30236SXX074X1	45.72
40	7110-30240SXX074X1	50.80
42	7110-30242SXX074X1	53.34
48	7110-30248SXX074X1	60.96
50	7110-30250SXX074X1	63.50
52	7110-30252SXX074X1	66.04

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	JYHuang	2012/11/02	UNIT	mm	SEE TAB
				x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54mm IC SOCKET 180° H=3.0 L=7.43 Row of Pitch 15.24
				x.xxx ±0.15			SHEET	1/1	Customer NO.
AO	2012/11/02	NEW	-----	Angle ± 3°	APPROVE	DATE	PROJ.	⊕	
				DIM TOL					