


HSF


NOTES:
 Rated Current:3A
 Rated Voltage:250V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to+85℃

Contact Material:Brass
 Contact Plating:Au Or Sn over Ni
 Insulator Material:PA46+15%G.F (UL94V-0)

掏料槽依PIN数变化,无功能影响

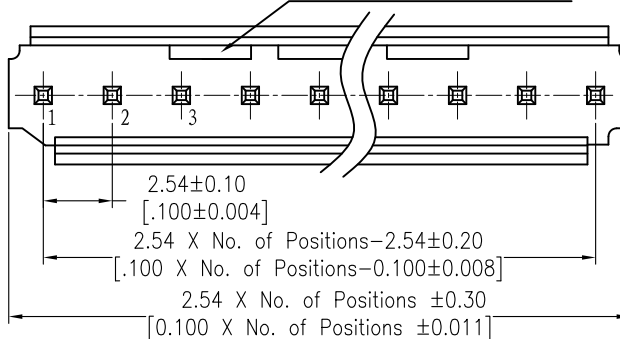

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)


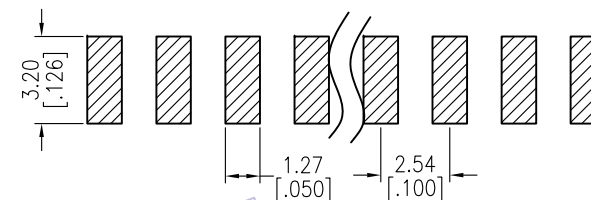


Ordering Information

WF2547 - 1 WZ XX X X 1

No. of Row
 Single Row
 No. of pins
 02P-20P
 Contact Plating
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 SM=Matte Tin
 Color
 B=Black R=REEL
 T=Natural T=TUBE
 Packing
 R=REEL
 T=TUBE

SQ.0.64±0.02
 [.025±0.001]

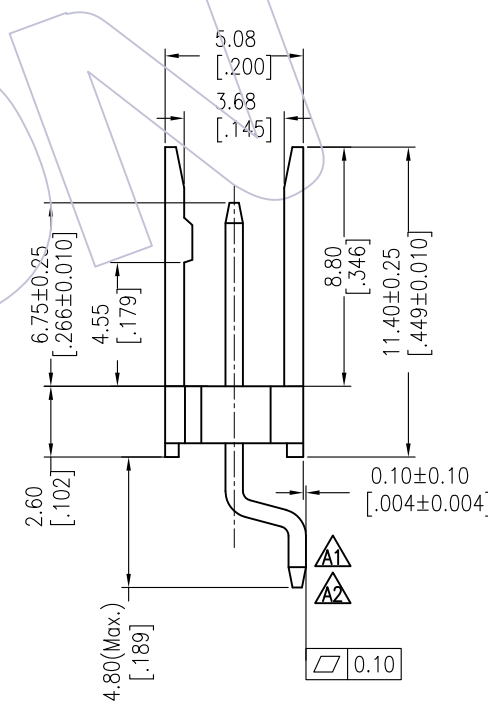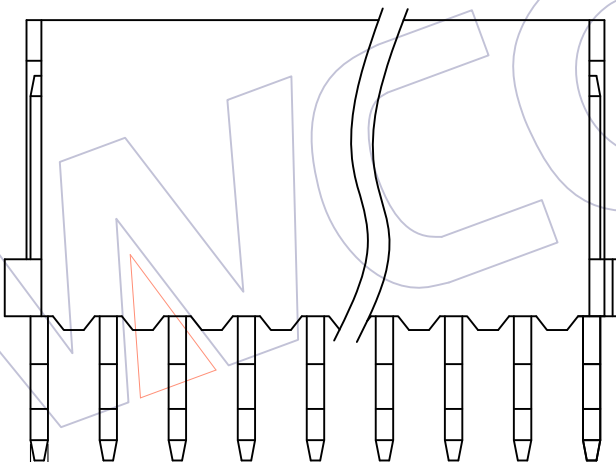

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2015/01/05	修改端子SMT脚形状		x.X ±0.40	JYHuang	2015/01/05	UNIT	mm	WF2547-1WZXXXXX1
A1	2013/10/24	0.10 ^{+0.10} _{-0.05} → 0.10±0.10, 修改端子SMT脚形状		x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54 WAFER SINGLE ROW 90° SMT "T" TYPE
AO	2012/09/19	NEW		x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					