

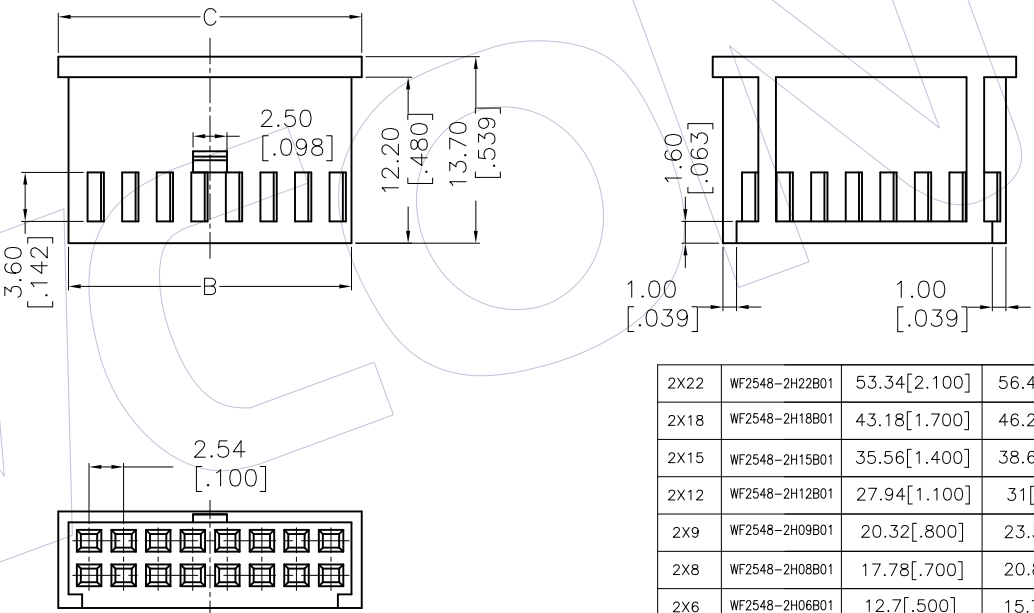


HSF

NOTES:

Current Rating:3.0A AMP
 Contact Resistance:20milliohm Max
 Withstand Voltage:1000V AC/Minute
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-25°C to +85°C

Housing Material:PBT+30%GF Black(UL94V-0)
 Contact Material:Brass
 Contact plating:Sn over Ni Plating

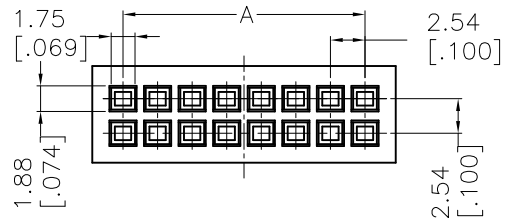

Ordering Information

WF2548-2 H XX B 0 1

Colour:
B:Black

2X22	WF2548-2H22B01	53.34[2.100]	56.4[2.220]	57.9[2.280]
2X18	WF2548-2H18B01	43.18[1.700]	46.2[1.819]	47.8[1.882]
2X15	WF2548-2H15B01	35.56[1.400]	38.6[1.520]	40.1[1.579]
2X12	WF2548-2H12B01	27.94[1.100]	31[1.220]	32.5[1.280]
2X9	WF2548-2H09B01	20.32[.800]	23.3[.917]	24.9[.980]
2X8	WF2548-2H08B01	17.78[.700]	20.8[.819]	22.3[.878]
2X6	WF2548-2H06B01	12.7[.500]	15.7[.618]	17.2[.677]
2X5	WF2548-2H05B01	10.16[.400]	13.2[.520]	14.7[.579]
2X4	WF2548-2H04B01	7.62[.300]	10.6[.417]	12.2[.480]
Circuit	Part No.	Dimension		
		A	B	C

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW LKP	DATE	SCALE	1:1	PART NO.
	A0	2012.11.16	NEW	-	X.X ±0.40	CHECK	2012.11.16	UNIT	mm inch	WF2548-2HXXB01
					X.XX ±0.25	APPROVE	DATE	SIZE	A4	TITLE: 2.54mm Double Row Housing
					X.XXX ±0.15		DATE	SHEET	1/1	Customer NO.
					Angle ± 3'			PROJ.	⊕	
					DIM TOL					