

HSF



NOTES:

Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK





Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

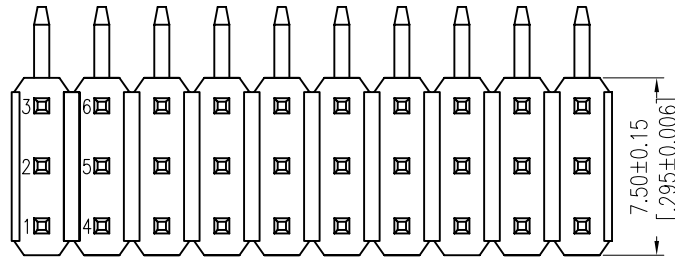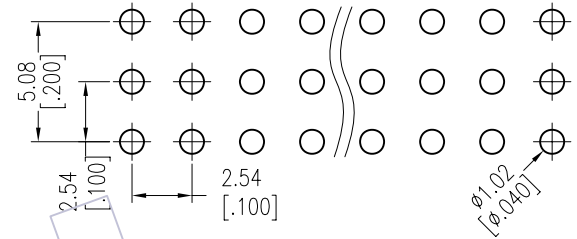

Ordering Information

1125-13 XX XX R XXX X 1

| | | | |
|------------------------------|---|---|---------------------|
| No. of Pins Per Row:03-40 | Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin | Pin Length(Short) L=A+B+D+3.7 Standard:139=13.9 T=Tube | Packing 0=PE Bag |
|------------------------------|---|---|---------------------|

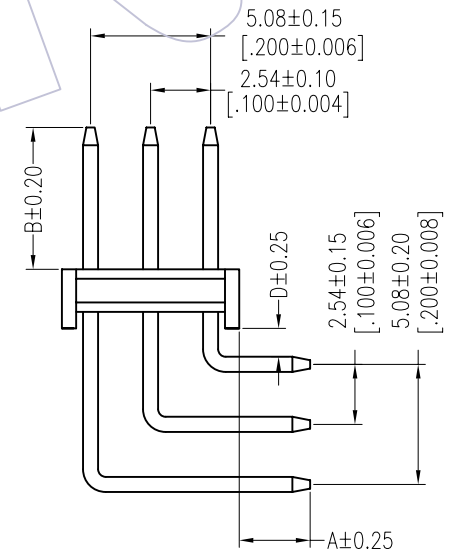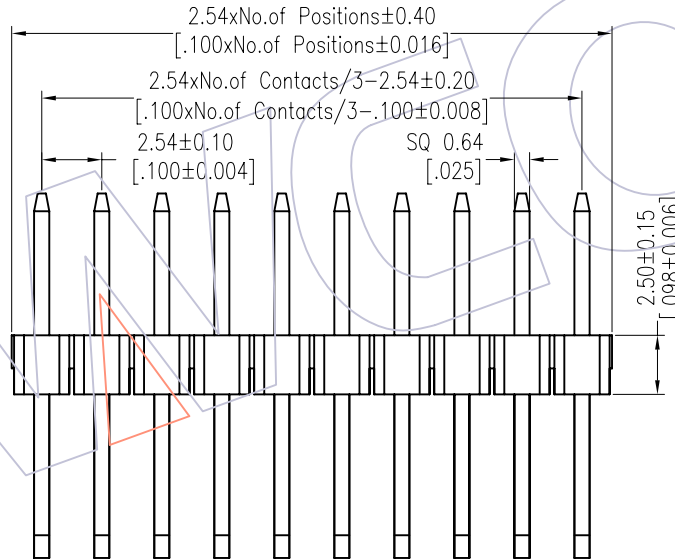

| Item | Pin Length | A | D | B | Mating |
|-----------|------------|------|------|------|--------|
| Standard | 13.90 | 3.00 | 1.20 | 6.00 | 2185 |
| Alternate | | | | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | Fit | PART NO. |
|-----|------------|--------------------------|--------|-------------|--------------|------------|-------|-----------|--|
| | | | | X.X ±0.40 | William Chen | 2013.02.28 | UNIT | mm [inch] | 1125-13XXXXRXXXXX |
| A1 | 2013/02/28 | Modify Drawing | ----- | X.XX ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: PH2.54 THREE ROW 90° CONCAVE BENDING H=2.5 |
| AO | 2012/06/16 | NEW | ----- | X.XXX ±0.15 | APPROVE | DATE | SHEET | 1/1 | Customer NO. |
| | | | | Angle ± 3' | | | PROJ. | | |
| | | | | DIM TOL | | | | | |

Http: www.wcon.com

| | |
|---|--|
| WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com | WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com |
|---|--|